





CONNECTION DIAGRAM

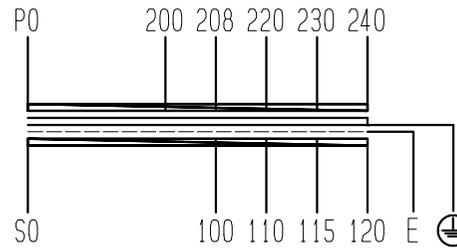

TERMINAL ARRANGEMENT

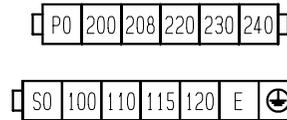

DRY-TYPE TRANSFORMER
FOR INDOOR USE ONLY

PHASE	1	
FREQUENCY	50/60	Hz
RATING	CONT.	
CAPACITY	3	kVA
PRI. VOLTAGE	240-230-220-208-200 V	
SEC. VOLTAGE	120-115-110-100 V	
SEC. CURRENT	30.0	A
INS. CLASS	Class 130(B) Des. 130	
MASS	35	kg
DIELECTRIC STRENGTH		
P-E	2.5 kV	1min
P-S	2.5 kV	1min
S-E	2.5 kV	1min

STANDARD UL1446

UL File No. E222180(Ins.)

WITH EARTH-SHIELD PLATE BETWEEN
H. V. AND L. V. WINDING

TERMINAL (TOYOGIKEN)




PRI.: PT-80 75A, M5, max14sq

SEC.: PT-90 95A, M6, max22sq

⊕ : PT-40 40A, M4, max5.5sq

E : PT-40 40A, M4, max5.5sq

NAME PLATE

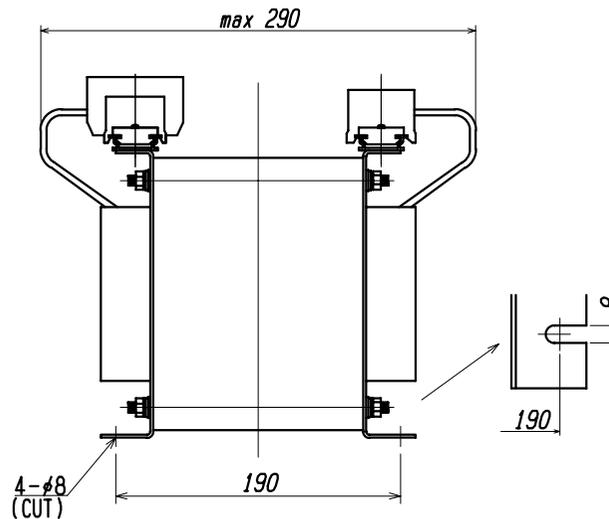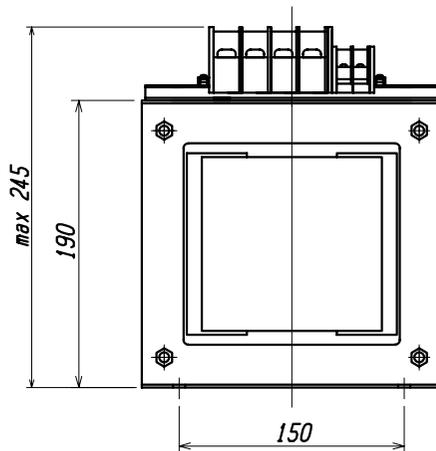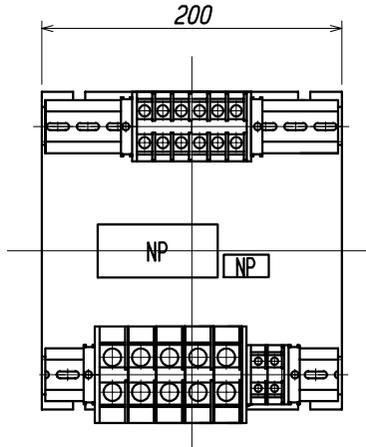

			尺 度 SCALE	/	換 図 CHECKED	設 計 DESIGNED	製 図 DRAWN	担 当 者 APPROVED	名 称 TITLE
			単 位 UNIT	mm					AUL-3KE DRY-TYPE TRANSFORMER
特 殊 MARK	年 月 日 DATE	記 事 CONTENTS	第 三 角 法 3RD ANGLE PROJECTION			日 付 DATE	相 原 電 機 株 式 有 限 公 司 AIHARA ELECTRIC CO., LTD.		図 面 番 号 DRG. NO.
変 更 CHANGE									