



DRY-TYPE TRANSFORMER
FOR INDOOR USE ONLY

PHASE	1	
FREQUENCY	50/60	Hz
RATING	CONT.	
CAPACITY	5	kVA
PRI. VOLTAGE	240-230-220-208-200 V	
SEC. VOLTAGE	120-115-110-100 V	
SEC. CURRENT	50.0	A
INS. CLASS	Class 180(H) Des. 180	
MASS	46	kg
DIELECTRIC STRENGTH		
	P-E	2.5 kV 1min
	P-S	2.5 kV 1min
	S-E	2.5 kV 1min

STANDARD	UL1446
UL File No.	E222180(Ins.)


WITH EARTH-SHIELD PLATE BETWEEN
H. V. AND L. V. WINDING

TERMINAL (TOYOGIKEN)

PRI.	: PT-80 6P 75A M5 max14sq
SEC.	: PT-90 5P 95A M6 max22sq
⊕	: PT-40 1P 40A M4 max5.5sq
E	: PT-40 1P 40A M4 max5.5sq


NAME PLATE

DRY-TYPE TRANSFORMER	
TYPE AUL-5KE	
PHASE 1	CLASS 180(H)
CAPACITY 5 kVA	FREQ. 50/60 Hz
PRI. V 240-230-220-208-200 V	
SEC. V 120-115-110-100 V	
SEC. A 50.0 A	MASS 46 kg
% IMP	% at 115°C
DATE	SER. No.
AIHARA ELECTRIC CO., LTD.	







FILE No. E222180
Class180(H)Ins. Des. 180

CONNECTION DIAGRAM

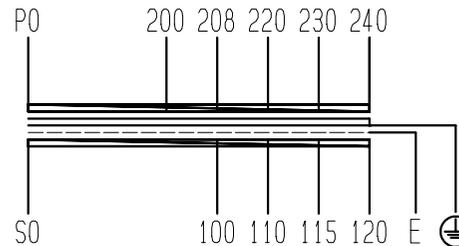

TERMINAL ARRANGEMENT

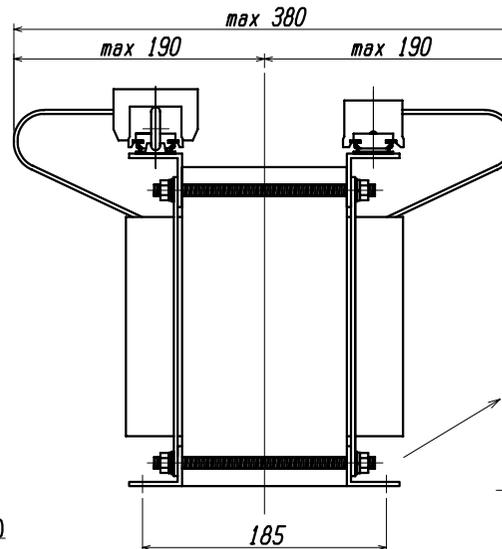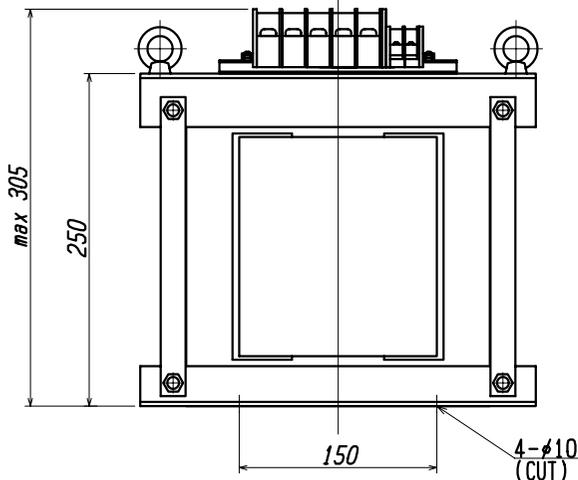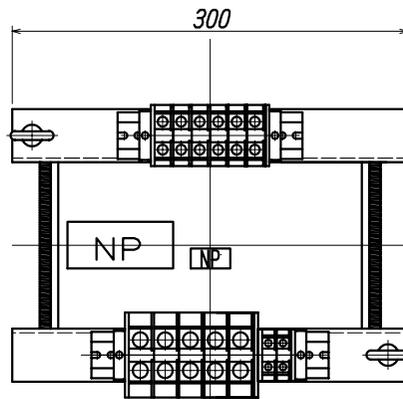

			尺度 SCALE	/	検 査 CHECKED	設 計 DESIGNED	製 図 DRAWN	担 当 者 APPROVED	名 称 TITLE
			単 位 UNIT	mm					AUL-5KE DRY-TYPE TRANSFORMER
特 殊 記 号 MARK	製 日 DATE	記 事 CONTENTS	第 三 角 法 3RD ANGLE PROJECTION		日 付 DATE	相 原 電 機 株 式 有 限 公 司 AIHARA ELECTRIC CO., LTD.		図 番 号 DWG. NO.	
変 更 CHANGE									