



締付キャップ

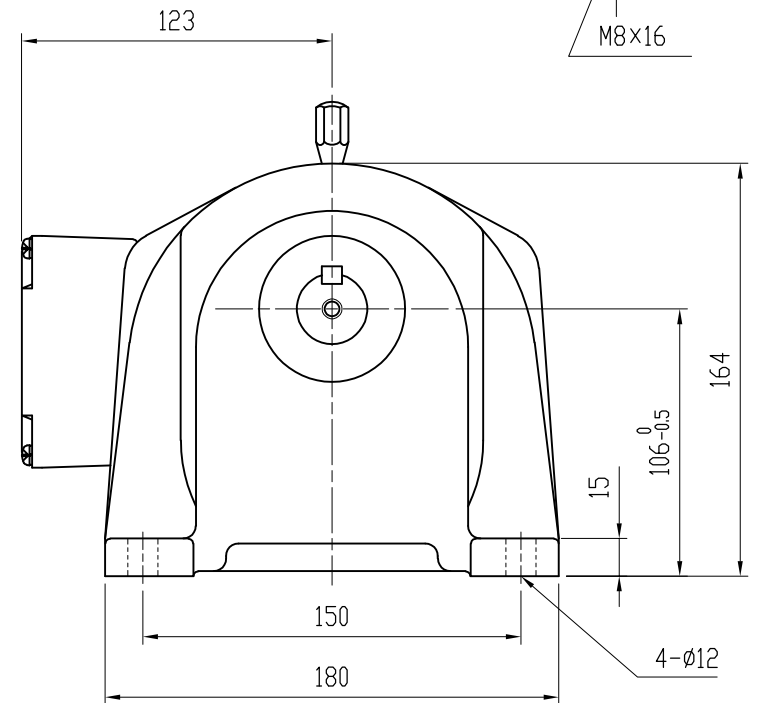

Technical drawing of a circular component. The drawing shows a top view of a cylinder with a diameter of 31. A central hole has a diameter of 8. A rectangular feature is located on the top surface, with a width of 7. The drawing is labeled with dimensions 8, 7, 31, and M8x16.



MOTOR (THREE PHASE INDUCTION MOTOR) モーター仕様 (三相誘導電動機)		GEARED SPECIFICATION 減速機仕様		BRAKE SPECIFICATION ブレーキ仕様		DATE 日付	2019. 5. 10		USER 納入先		
OUTPUT 出力	0.4 kW	RATIO 減速比	1/60, 1/80, 1/100	BRAKE TORQUE ブレーキトルク	4.0 N・m	SCALE 尺度	1:3		TYPE 型式	VX04-060~100BS3	
VOLTS 電圧	200/200, 220 V			TYPE 方式	NEGATIVE ACTUATED 無励磁作動形	APPROVED 承認	A. YAMADA		NAME 名称	VX SERIES FOOD MACHINES GEARED MOTOR VXシリーズ食品機械向けギヤードモータ	
FREQUENCY 周波数	50/60 Hz	LUBRICANT 潤滑方式	GREASE グリス			CHECKED 照査	Y. KODUKA		DRAWING No. 図番	ND-04100BS3-P1	
REVOLUTION 回転速度	1500/1800, 1800 r/min	COLOR 塗装色	BLUE ブルー			DRAWN 作成	Y. SAITOH		富士変速機株式会社 FUJIHENSOKUKI CO., LTD		
RATING 定格	S1	TOTAL WEIGHT 製品質量	16 kg								