





IKO ストロークロータリブッシング 開放形

	汎用								重荷重用							
形状	ST								ST...B							
																
大きさ	4	5	6	8	10	12	16	—	—	—	8	10	12	16	—	—
	20	25	30	35	40	45	50	20	25	30	35	40	45	50	—	—
	55	60	70	80	90	100	—	55	60	70	80	90	100	—	—	—

軸径 mm	呼び番号					主要寸法 mm				
	汎用	質量(参考) g	重荷重用	質量(参考) g		F_w	D	L_1	L_2	
4	ST 4814	2.9	—	—	—	4	8	14	9	—
5	ST 51016	5.6	—	—	—	5	10	16	10.6	—
6	ST 61219	8.9	—	—	—	6	12	19	13.2	—
8	ST 81524	15.6	ST 81524 B	16.8	—	8	15	24	17.1	—
10	ST 101930	28.8	ST 101930 B	31.2	—	10	19	30	22.7	—
12	ST 122332	42	ST 122332 B	46	—	12	23	32	24.5	—
16	ST 162837	71	ST 162837 B	75	—	16	28	37	29.1	—
20	ST 203245	99	ST 203245 B	106	—	20	32	45	35.8	—
25	ST 253745	117	ST 253745 B	125	—	25	37	45	35.8	—
30	ST 304565	205	ST 304565 B	220	—	30	45	65	53.5	—
35	ST 355270	329	ST 355270 B	346	—	35	52	70	58.5	—
40	ST 406080	516	ST 406080 B	540	—	40	60	80	68.3	—
45	ST 456580	563	ST 456580 B	588	—	45	65	80	68.3	—
50	ST 5072100	827	ST 5072100 B	862	—	50	72	100	86.4	—
55	ST 5580100	1 160	ST 5580100 B	1 200	—	55	80	100	86.4	—
60	ST 6085100	1 240	ST 6085100 B	1 290	—	60	85	100	86.4	—
70	ST 7095100	1 400	ST 7095100 B	1 450	—	70	95	100	86.4	—
80	ST 80110100	2 050	ST 80110100 B	2 110	—	80	110	100	86	—
90	ST 90120100	2 250	ST 90120100 B	2 330	—	90	120	100	86	—
100	ST 100130100	2 440	ST 100130100 B	2 520	—	100	130	100	86	—

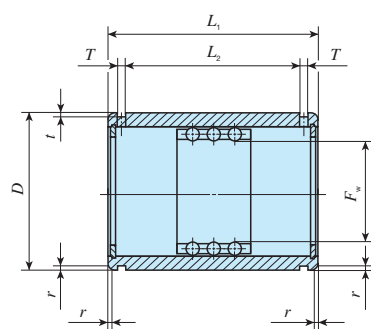

ST

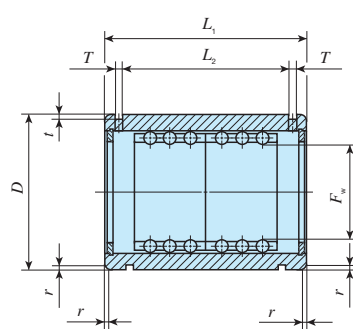

ST...B

	T	t	r	最 大 ス ト ロ ー ク 長 mm	ST 基 本 動 定 格 荷 重 C N	基 本 静 定 格 荷 重 C_0 N	最 大 ス ト ロ ー ク 長 mm	ST...B 基 本 動 定 格 荷 重 C N	基 本 静 定 格 荷 重 C_0 N
	1.1	0.25	0.3	10	112	59.5	—	—	—
	1.1	0.25	0.3	13	121	68.3	—	—	—
	1.1	0.25	0.3	15	278	168	—	—	—
	1.5	0.5	0.5	24	315	211	8	512	422
	1.5	0.5	0.5	30	659	466	8	1 070	932
	1.5	0.5	0.5	32	1 110	822	8	1 800	1 640
	1.5	0.5	0.5	40	1 230	998	16	1 990	2 000
	2	0.5	0.5	54	1 390	1 250	28	2 250	2 500
	2	0.5	1	54	1 450	1 430	28	2 360	2 850
	2.5	0.5	1	82	3 110	3 160	44	5 060	6 320
	2.5	0.7	1.5	92	3 290	3 550	54	5 340	7 100
	2.5	0.7	1.5	108	4 340	4 810	66	7 050	9 630
	2.5	0.7	1.5	108	4 550	5 330	66	7 390	10 700
	3	1	1.5	138	5 790	6 970	88	9 400	13 900
	3	1	2	138	6 030	7 630	88	9 800	15 300
	3	1	2	138	6 260	8 300	88	10 200	16 600
	3	1	2	138	6 510	9 320	88	10 600	18 600
	3	1.5	2	132	8 230	12 200	76	13 400	24 400
	3	1.5	2	132	8 550	13 500	76	13 900	27 000
	3	1.5	2	132	8 820	14 800	76	14 300	29 500

1N≒0.102kgf