
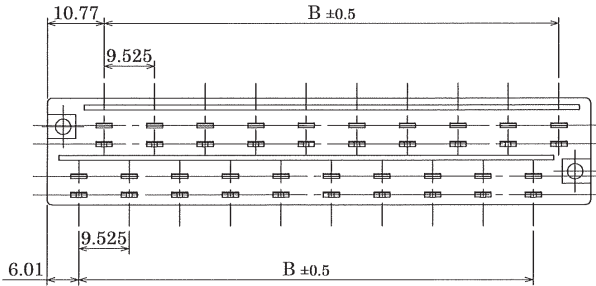

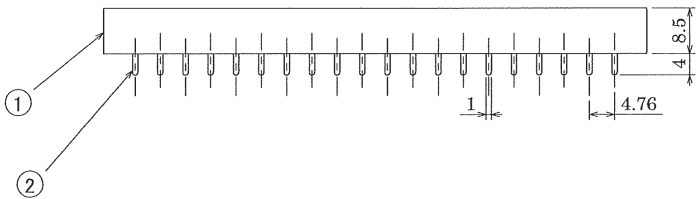



REVISION	SIGN	DATE	CONTENT	DWG.	APPRD.

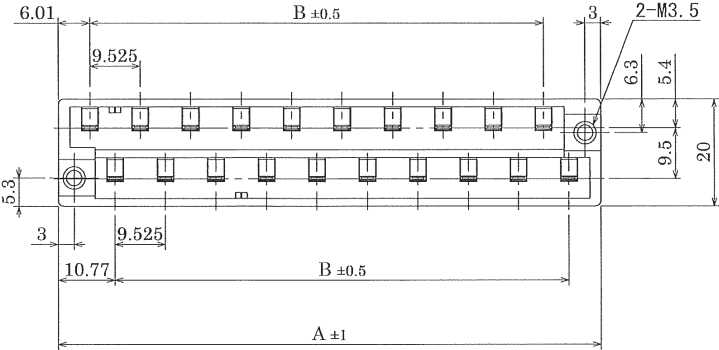

Poles	20P	30P
A	102.51	150.12
B	85.72	133.35

							TOLERANCE UNLESS OTHERWISE SPECIFIED	RATING		DWG. No.	104759	DESIGN.		
3	Nut	Brass	M3.5×0.6	Nickel-Plated		2	10 and below ±0.2	AC 250 V. 10 A.	INSULATION RESISTANCE	TYPE.	F5203C	DWG.	T. K	'92. 10. 23
2	Contact C	Brass	t=0.8	Gold-Plated	(flash)	P	over 10 to 50 ±0.35	DC 500 V. 1000 MΩ.		3RD. ANGLE PROJECTION	UNIT mm	SCALE 1 / 1	CHK.	
1	Base C	PBT (UL94V-0)			Black	1		WITHSTANDS VOLTAGE			FUJICON CO., LTD	APPRD.	Gotou	'92. 11. 4
No.	PARTS NAME	MATERIAL	SIZE	TREATMENT	REMARKS	AMOUNT	over 50 to 160 ±0.5	AC 2000 V. 1minute and over						