

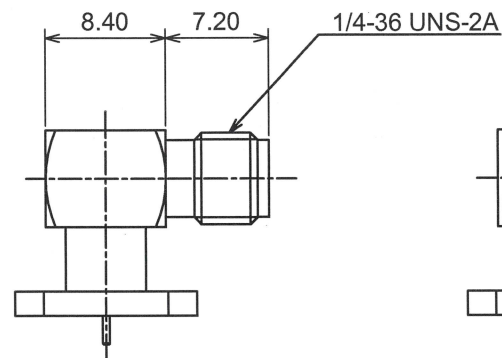


RoHS10 Support

REACH Support

CFSI Support

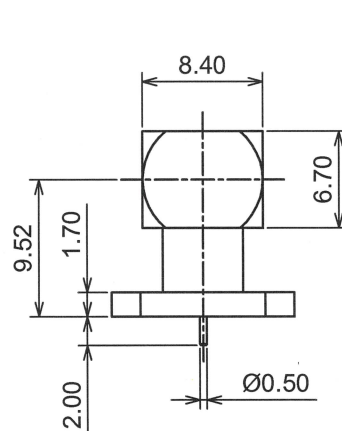

○規格 (Standard)
MIL-C-39012

○仕様 (Specification)

特性インピーダンス (Impedance): 50 Ω

定格周波数 (Working Frequency Range): DC~6GHz

電圧定在波比 (VSWR): ≤1.30 at 6GHz

挿入損失 (Insertion Loss): 0.04dB max × √f GHz (f:Frequency)

定格電圧 (Voltage Rating): 170V rms

耐電圧 (Proof Voltage): 500V rms


接触抵抗 (Contact Resistance): 3mΩ max

絶縁抵抗 (Insulation Resistance): ≥5000MΩ

勘合保証回数 (Connector Life): 500 times min

使用温度範囲 (Temperature range): -50°C~150°C

推奨締め付けトルク (Recommended Torque) 0.8~1.1 Nm

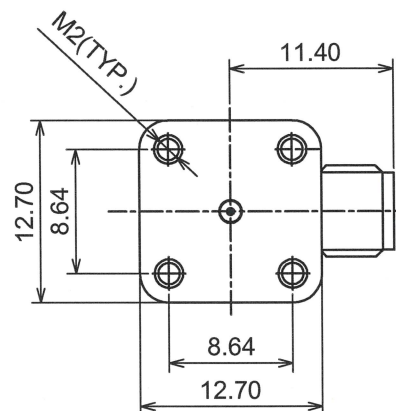

TOLERANCE				日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD	
DECIMALS	.XX ±0.10	.X ±0.15			
DIAMETER	.X ±0.10				
Approved	Checked	Drawn	Unit	NAME	REV
mm					
			A4	SMA-RSL-127-Au	1

3	Contact	BeCu	GOLD
2	Dielectric	PTFE	NONE
1	Body	BRASS	GOLD
No	DESCRIPTION	MATERIAL	FINISH