


RoHS10 Support

REACH Support

CFSI Support

○形状 (SHAPE)

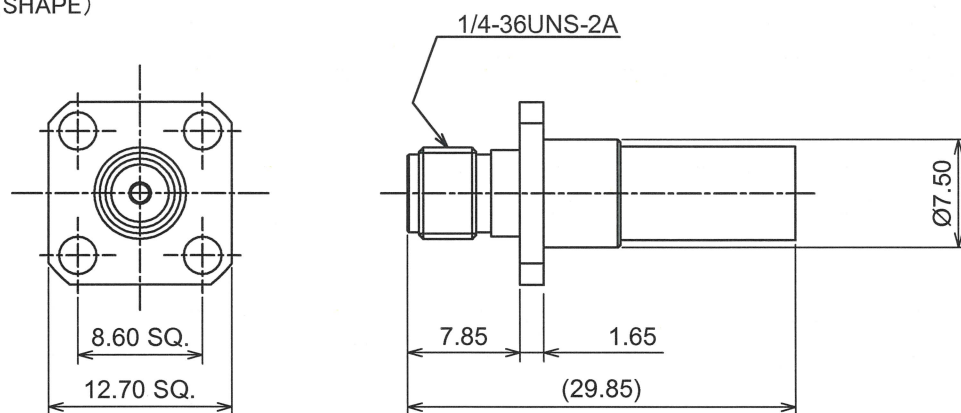

○規格 (Standard)

JIS-C-5410

○仕様 (Specification)

特性インピーダンス (Impedance): 50Ω

定格周波数 (Working Frequency Range): DC~6GHz

電圧定在波比 (VSWR): ≤ 1.30 at 6GHz挿入損失 (Insertion Loss): $0.05\text{dB max} \times \sqrt{f \text{ GHz}}$ (f:Frequency)

定格電圧 (Voltage Rating): 335V rms

耐電圧 (Proof Voltage): 800V rms

接触抵抗 (Contact Resistance): $5\text{m}\Omega \text{ max}$ 絶縁抵抗 (Insulation Resistance): $\geq 5000\text{M}\Omega$

勘合保証回数 (Connector Life): 500 times min


推奨締め付けトルク (Recommended Torque) 0.8~1.1 Nm



4	FERRULE	BRASS	NICKEL
3	Contact	BeCu	GOLD
2	Dielectric	PTFE	NONE
1	Body	BRASS	GOLD
No	DESCRIPTION	MATERIAL	FINISH


○加工寸法 (ASSEMBLY)

RECOMMENDED CABLE STRIPPING DIMS



SOLDER CONTACT TO CABLE CENTER CONDUCTOR

RECOMMENDED CLIPPING TOOL SIZE

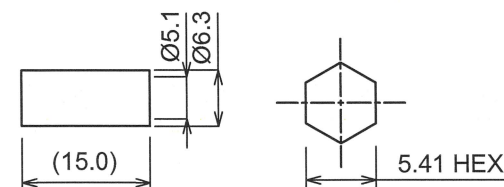RECOMMENDED CRIMP HEIGHT 5.55 ± 0.2 The tolerance in this area is ± 0.10

TOLERANCE

DECIMALS .XX ± 0.10 .X ± 0.15
DIAMETER .X ± 0.10

Approved Checked Drawn

エレパーツ
'22.02.01
山崎エレパーツ
'22.02.01
大江エレパーツ
'22.02.01
大江

Unit

mm

A4

NAME

日本エレパーツ株式会社
NIHON ELEPARTS Co.,LTD

SMA-PJ-2.5DHQ (AU)

REV

1