


RoHS10 Support

REACH Support

CFSI Support

○形状 (SHAPE)

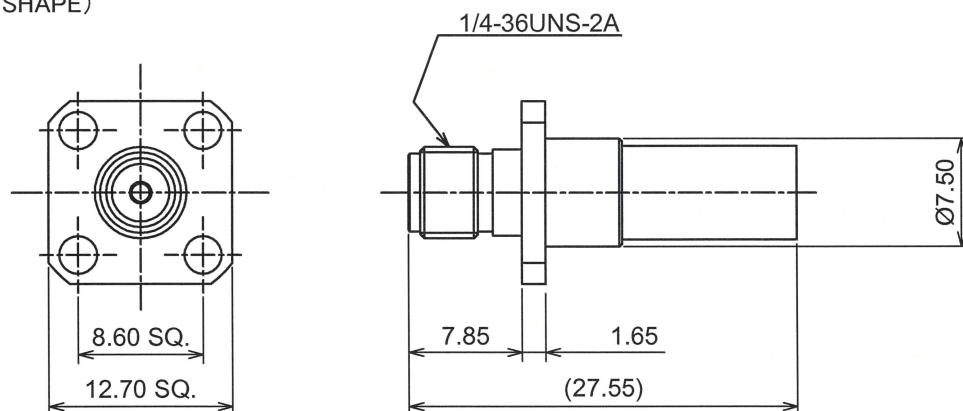

○規格 (Standard)

JIS-C-5410

○仕様 (Specification)

特性インピーダンス (Impedance): 50 Ω

定格周波数 (Working Frequency Range): DC~6GHz

電圧定在波比 (VSWR): ≤ 1.30 at 6GHz

挿入損失 (Insertion Loss): 0.05dB max × √f GHz (f:Frequency)

定格電圧 (Voltage Rating): 335V rms

耐電圧 (Proof Voltage): 800V rms

接触抵抗 (Contact Resistance): 5m Ω max

絶縁抵抗 (Insulation Resistance): ≥ 5000M Ω

勘合保証回数 (Connector Life): 500 times min


推奨締め付けトルク (Recommended Torque) 0.8~1.1 Nm



4	FERRULE	BRASS	NICKEL
3	Contact	BeCu	GOLD
2	Dielectric	PTFE	NONE
1	Body	BRASS	GOLD
No	DESCRIPTION	MATERIAL	FINISH


○加工寸法 (ASSEMBLY)

RECOMMENDED CABLE STRIPPING DIMS



SOLDER CONTACT TO CABLE CENTER CONDUCTOR

RECOMMENDED CLIPPING TOOL SIZE

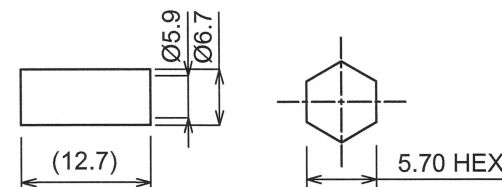

RECOMMENDED CRIMP HEIGHT 5.76±0.2

The tolerance in this area is ± 0.10

TOLERANCE			Unit	日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD	
DECIMALS	.XX ±0.10	.X ±0.15			
DIAMETER	.X ±0.10		mm	SMA-PJ-3D(AU)	
Approved	Checked	Drawn	A4		
エレパーツ '22.02.01 山崎	エレパーツ '22.02.01 大江	エレパーツ '22.02.01 大江		REV	
				1	