


RoHS10 Support

REACH Support

CFSI Support

Reverse

○形状 (SHAPE)

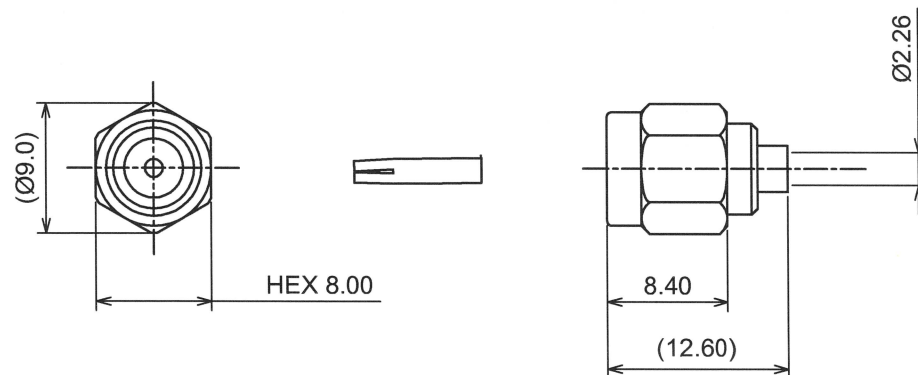○規格 (STANDARD)
MIL-C-39012

○仕様 (SPECIFICATION)

特性インピーダンス (Impedance): 50Ω

定格周波数 (Working Frequency Range): DC~18GHz

電圧定在波比 (VSWR): ≤ 1.20 max at 18GHz挿入損失 (Insertion Loss): $0.04\text{ dB max} \times \sqrt{f\text{ GHz}}$ (f: Frequency)


定格電圧 (Voltage Rating): 335 Vrms max

耐電圧 (Proof Voltage): 1000 Vrms max

勘合保証回数 (Connector Life): 500 times min


使用温度範囲 (Temperature range): $-65^{\circ}\text{C} \sim 165^{\circ}\text{C}$ 推奨締め付けトルク (Recommended Torque) $0.8 \sim 1.1\text{ Nm}$

6	GASKET	S.I.R	RED
5	R-ring	SUS303	NATURE
4	Coupling Nut	BRASS	NICKEL
3	Contact	BeCu	GOLD
2	Dielectric	PTFE	NONE
1	Body	BRASS	GOLD
No	DESCRIPTION	MATERIAL	FINISH




○加工寸法 (ASSEMBLY)

RECOMMENDED STRIPPING INSTRUCTIONS



SOLDER CONTACT TO CABLE CENTER CONDUCTOR



SOLDER TO THE ABOVE

The tolerance in this area is ± 0.10

TOLERANCE

DECIMALS .XX ± 0.08 .X ± 0.13
DIAMETER .X ± 0.03

Approved

Checked

Drawn

Unit
mmエレパーツ
'24.01.19
山崎エレパーツ
'24.01.19
大江エレパーツ
'24.01.19
大江

A4

NAME

日本エレパーツ株式会社
NIHON ELEPARTS Co.,LTD

RSMA-PS-UT085

REV

3