


RoHS10 Support

REACH Support

CFSI Support

IP67 Waterproof after mating (Before the panel)

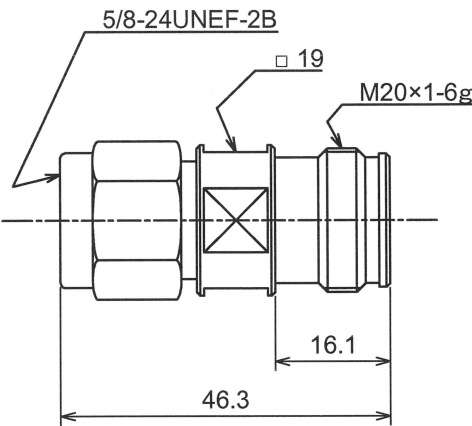

○仕様 (Specification)

- 特性インピーダンス (Impedance) : 50 Ω
- 定格周波数 (Working Frequency Range) : DC~6GHz
- 電圧定在波比 (VSWR) : ≤1.20 at 6GHz
- 定格電圧 (Voltage Rating) : 500V rms
- 耐電圧 (Proof Voltage) : Ac1.0KV
- 接触抵抗 (Contact Resistance) : 1mΩ max(4.3/10)、1.5mΩ max(N)
- 絶縁抵抗 (Insulation Resistance) : ≥5000MΩ
- 使用温度範囲 (Temperature Range) : -55~165℃
- パッシブ相互変調 (PIM3) : ≤-160dBc
- 締め付けトルク (Tightening Torque) : 5N・m(4.3/10)、1.7N・m(N)
- 勘合保証回数 (Connector Life) : 100 times min



7	Gasket	Silicone	NONE
6	Nut	BRASS	Nickel
5	Snap Ring	Stainless	NONE
4	Body	Brass	Tertiary alloy
3	Dielectric	PTFE	NONE
2	Center Contact	P.Bronze	Silver
1	Contact head	P.Bronze	Silver
No	DESCRIPTION	MATERIAL	FINISH

TOLERANCE DECIMALS .XX ±0.10 .X ±0.15 DIAMETER .X ±0.10				日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD	
Approved	Checked	Drawn			
			Unit mm	NAME 4.3)10J-NP	REV 1
			A4		