


RoHS10 Support

REACH Support

CFSI Support

IP67 Waterproof after mating (Before the panel)

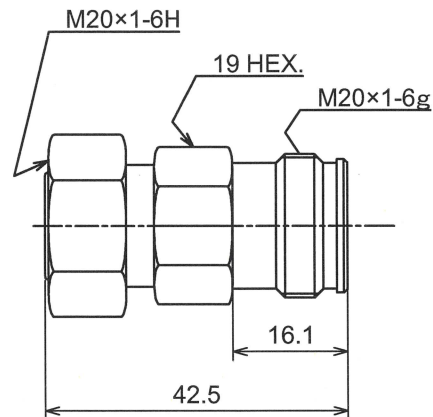

○仕様 (Specification)

特性インピーダンス (Impedance) : 50 Ω

定格周波数 (Working Frequency Range) : DC~6GHz

電圧定在波比 (VSWR) : ≤1.20 at 6GHz

定格電圧 (Voltage Rating) : 500V rms

耐電圧 (Proof Voltage) : Ac1.0KV

接触抵抗 (Contact Resistance) : 1mΩ max(4.3/10)

絶縁抵抗 (Insulation Resistance) : ≥5000MΩ

使用温度範囲 (Temperature Range) : -55~165℃

パッシブ相互変調 (PIM3) : ≤-160dBc

締め付けトルク (Tightening Torque) : 5N・m(4.3/10)

勘合保証回数 (Connector Life) : 100 times min



7	O-ring	Silicone	NONE
6	Spring	Steels	
5	Nut	BRASS	Nickel
4	Body	BRASS	Ternary alloy
3	Dielectric	PTFE	NONE
2	Center Contact	P.Bronze	Silver
1	Contact head	P.Bronze	Silver
No	DESCRIPTION	MATERIAL	FINISH

TOLERANCE DECIMALS .XX ±0.10 .X ±0.15 DIAMETER .X ±0.10				日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD		
Approved	Checked	Drawn				
			A4	NAME	4.3)10P-4.3)10J-HEX19	REV
大江	大江	大江				1