


RoHS10 Support

REACH Support

CFSI Support

IP67 Waterproof after mating (Before the panel)

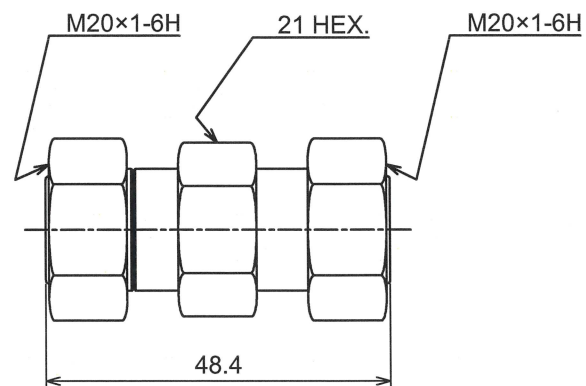

○仕様 (Specification)

特性インピーダンス (Impedance) : 50Ω

定格周波数 (Working Frequency Range) : DC~6GHz


電圧定在波比 (VSWR) : ≤ 1.20 at 6GHz

定格電圧 (Voltage Rating) : 500V rms

耐電圧 (Proof Voltage) : Ac1.0KV

接触抵抗 (Contact Resistance) : $1m\Omega$ max(4.3/10)絶縁抵抗 (Insulation Resistance) : $\geq 5000M\Omega$ 使用温度範囲 (Temperature Range) : $-55\sim 165^{\circ}\text{C}$ パッシブ相互変調 (PIM3) : $\leq -160\text{dBc}$ 締め付けトルク (Tightening Torque) : $5\text{N}\cdot\text{m}$ (4.3/10)

勤合保証回数 (Connector Life) : 100 times min

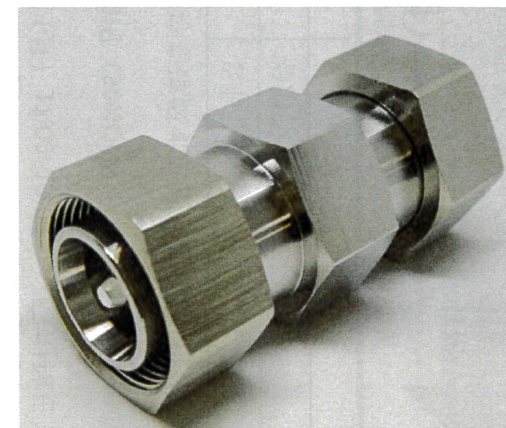

6	O-ring	Silicone	NONE
5	Nut	BRASS	Nickel
4	Snap Ring	Stainless	NONE
3	Body	Brass	Termary alloy
2	Dielectric	PTFE	NONE
1	Center Contact	Brass	Silver
No	DESCRIPTION	MATERIAL	FINISH

TOLERANCE

DECIMALS .XX ± 0.10 .X ± 0.15
DIAMETER .X ± 0.10

Approved

Checked

Drawn

Unit
mm

A4

N
A
M
E日本エレパーツ株式会社
NIHON ELEPARTS Co.,LTD

4.3)10P-4.3)10P-HEX21

REV

1