



RoHS10 Support REACH Support CFSI Support

IP67 Waterproof after mating (Before the panel)

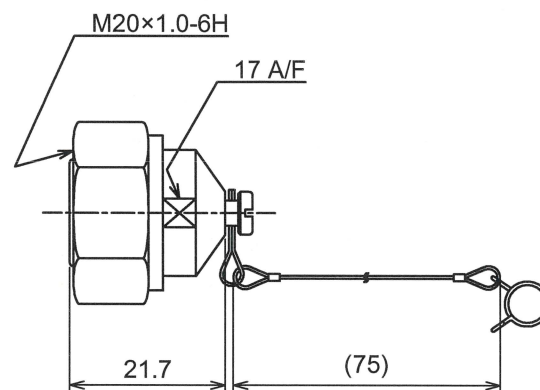

	A	B	D	Material	Maximum opening inside diameter
Q67103	3mm	0.8mm	70°	304H	3.3mm ~ 3.5mm
Q671035	3.5mm	0.8mm	70°	304H	3.8mm ~ 4.2mm
Q67104	4mm	0.8mm	70°	304H	4.5mm ~ 4.8mm
Q67105	5mm	0.8mm	70°	304H	5.8mm ~ 6.2mm
Q67106	6mm	0.8mm	70°	304H	6.8mm ~ 7.3mm
Q67107	7mm	1.0mm	70°	304H	7.8mm ~ 8.5mm
Q671075	7.5mm	1.0mm	70°	304H	8.3mm ~ 9mm
Q67108	8mm	1.0mm	70°	304H	8.8mm ~ 9.5mm
Q67109	9mm	1.0mm	70°	304H	9.8mm ~ 10.6mm
Q67110	10mm	1.2mm	70°	304H	11mm ~ 11.5mm
Q67111	11mm	1.2mm	70°	304H	12mm ~ 13.2mm
Q67112	12mm	1.2mm	70°	304H	13.2mm ~ 14.3mm
Q67113	13mm	1.4mm	70°	304H	14.6mm ~ 15mm
Q67114	14mm	1.4mm	70°	304H	15.3mm ~ 16mm
Q67115	15mm	1.4mm	70°	304H	16.5mm ~ 17mm
Q67116	16mm	1.6mm	70°	304H	17.6mm ~ 18.2mm
Q67117	17mm	1.6mm	70°	304H	18.8mm ~ 19.2mm
Q67118	18mm	1.8mm	70°	304H	19.5mm ~ 20.5mm
Q67119	19mm	1.8mm	70°	304H	21mm ~ 21.5mm
Q67120	20mm	1.8mm	70°	304H	22mm ~ 22.6mm
Q67121	21mm	1.8mm	70°	304H	23mm ~ 23.3mm



○仕様 (Specification)

使用温度範囲 (Temperature Range) : -55 ~ 165°C

9	Take Off the Device	Stainless	NONE
8	Steel Wire	Steel	NONE
7	Metal Tablet	BRASS	Tarnary alloy
6	Drivepipe	Aluminium	NONE
5	Fastening Screw	Stainless	NONE
4	Gasket	Silicone	NONE
3	Snap Ring	Stainless	NONE
2	Coupling Nut	BRASS	Tarnary alloy
1	Body	BRASS	Tarnary alloy
No	DESCRIPTION	MATERIAL	FINISH



TOLERANCE DECIMALS .XX ±0.10 .X ±0.15 DIAMETER .X ±0.10				日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD	
Approved	Checked	Drawn			
			Unit mm	NAME 4.3)10P-Cap	REV 1
エレパーツ '22.06.29 大江	エレパーツ '22.06.29 大江	エレパーツ '22.06.29 大江	A4		