


RoHS10 Support

REACH Support

CFSI Support

IP67 Waterproof after mating (Before the panel)

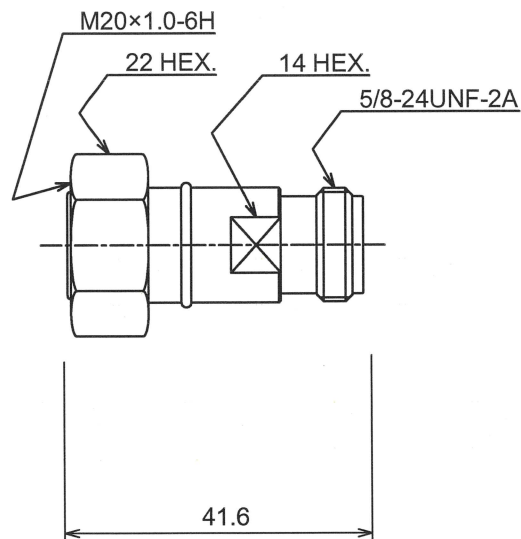

○仕様 (Specification)

特性インピーダンス (Impedance) : 50 Ω

定格周波数 (Working Frequency Range) : DC~6GHz

電圧定在波比 (VSWR) : ≤ 1.20 at 6GHz

定格電圧 (Voltage Rating) : 500V rms

耐電圧 (Proof Voltage) : Ac1.0KV

接触抵抗 (Contact Resistance) : $1\text{m}\Omega$ max(4.3/10)、 $1.5\text{m}\Omega$ max(N)絶縁抵抗 (Insulation Resistance) : $\geq 5000\text{M}\Omega$

使用温度範囲 (Temperature Range) : -55~165°C

パッシブ相互変調 (PIM3) : $\leq -160\text{dBc}$ 締め付けトルク (Tightening Torque) : $5\text{N}\cdot\text{m}$ (4.3/10)、 $1.7\text{N}\cdot\text{m}$ (N)

勘合保証回数 (Connector Life) : 100 times min



5	O-ring	Silicone	NONE
4	Nut	BRASS	Nickel
3	Body	Brass	Ternary alloy
2	Dielectric	PTFE	NONE
1	Center Contact	P.Bronze	Silver
No	DESCRIPTION	MATERIAL	FINISH

TOLERANCE				日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD	
DECIMALS	.XX ± 0.10	.X ± 0.15			
DIAMETER	.X ± 0.10				
Approved	Checked	Drawn	Unit	NAME	REV
			mm		
			A4	4.3)10P-NJ	1