


RoHS10 Support

REACH Support

CFSI Support

IP67 Waterproof after mating (Before the panel)

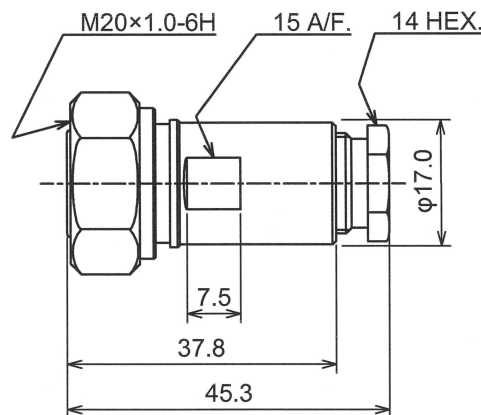

○仕様 (Specification)

特性インピーダンス (Impedance) : 50 Ω

定格周波数 (Working Frequency Range) : DC~6GHz

電圧定在波比 (VSWR) : ≤1.30 at 6GHz

定格電圧 (Voltage Rating) : 500V rms

耐電圧 (Proof Voltage) : Ac1.0KV

接触抵抗 (Contact Resistance) : 1mΩ max(4.3/10)

絶縁抵抗 (Insulation Resistance) : ≥5000MΩ


使用温度範囲 (Temperature Range) : -55~165°C

パッシブ相互変調 (PIM3) : ≤-160dBc

締め付けトルク (Tightening Torque) : 5N・m(4.3/10)

勘合保証回数 (Connector Life) : 100 times min

SUGGESTED STRIPPING INSTRUCTIONS



10	O-ring	Silicone	NONE
9	Gasket	Silicone	NONE
8	Clamp Nut	BRASS	Nickel
7	Washer	Brass	Termary alloy
6	Metal Washer	Brass	Termary alloy
5	Snap Ring	Stainless	NONE
4	Nut	BRASS	Nickel
3	Body	Brass	Termary alloy
2	Dielectric	PTFE	NONE
1	Center Contact	P.Bronze	Silver
No	DESCRIPTION	MATERIAL	FINISH

TOLERANCE				日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD	
DECIMALS	.XX ±0.10	.X ±0.15			
DIAMETER	.X ±0.10				
Approved	Checked	Drawn	Unit	NAME	REV
			mm		
			A4	4.3)10P-Z-5D2W	1