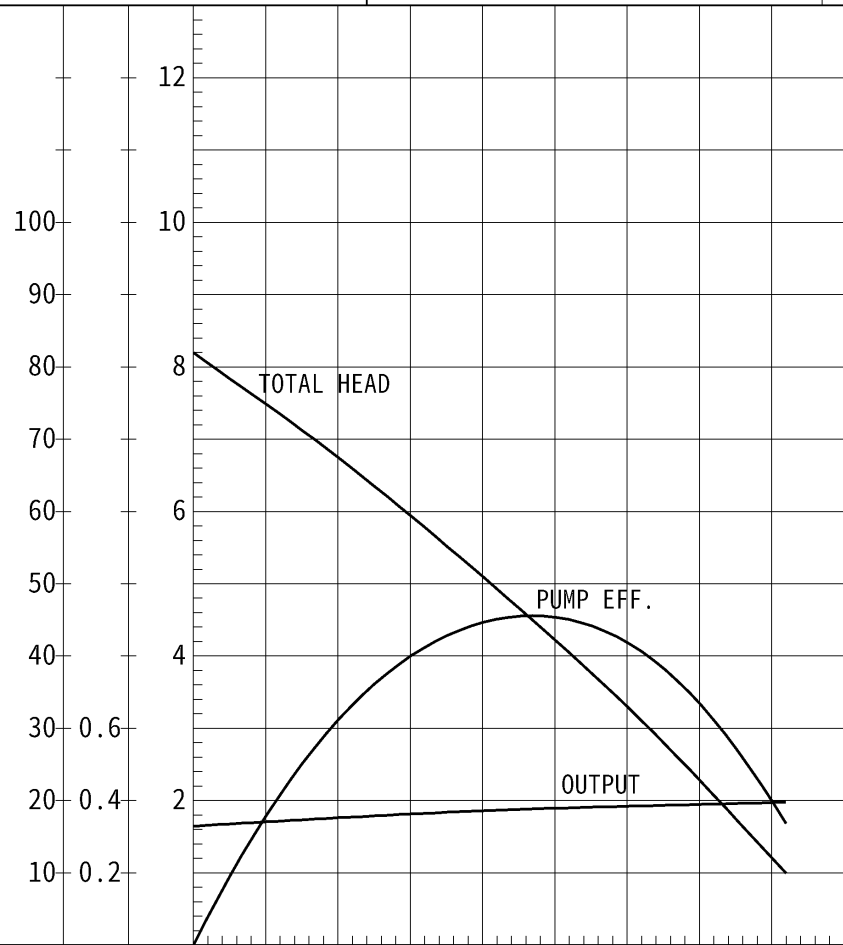


		No. 図番		A-15301-4	
予想性能曲線図				PUMP PERFORMANCE CURVES	
TYPE 名 称		汚物用水中ノンクロックポンプ		MODEL 型 式	
		50B4.4 -53		FREQUENCY 周波数	
				50 Hz	
CUSTOMER'S NAME 御注文先					
殿					
EQUIPMENT TITLE 機器名称					
No.					
		標 準 仕 様		STANDARD SPECIFICATIONS	
口 径		DISCHARGE BORE		50 mm	
全揚程		TOTAL HEAD		4.5 m	
吐出し量		CAPACITY		0.21 m³/min	
出 力		MOTOR OUTPUT		0.4 kW	
相×電圧		PHASE×VOLTAGE		3 φ × 200 V	
電 流		CURRENT		2.3 A	
極数：POLES		／回転速度：SPEED OF ROTATION		4 P / S.S.1500 min⁻¹	
始動方式		STARTING METHOD		じか入始動	
耐熱クラス		INSULATION CLASS		E	
				REMARKS:	
 The graph plots three performance metrics against capacity (m³/min) on the x-axis (0 to 0.6). The left y-axis has two scales: one for head (m) from 0 to 12, and one for efficiency (%) from 0 to 100. The right y-axis has two scales: one for output (kW) from 0 to 1.0, and one for head (m) from 0 to 12. The 'TOTAL HEAD' curve starts at approximately 8.2 m at 0 capacity and decreases linearly to about 1.8 m at 0.4 m³/min. The 'PUMP EFF.' curve starts at 0% at 0 capacity, peaks at approximately 45% efficiency at 0.25 m³/min, and then decreases. The 'OUTPUT' curve starts at approximately 0.15 kW at 0 capacity and increases slightly to about 0.2 kW at 0.4 m³/min.					
%	kW	m	CAPACITY		
PUMP EFF.	MOTOR OUTPUT	TOTAL HEAD	吐出し量		
ポンプ効率	出力	全揚程			
株式会社 鶴見製作所				TSURUMI MFG. CO., LTD.	