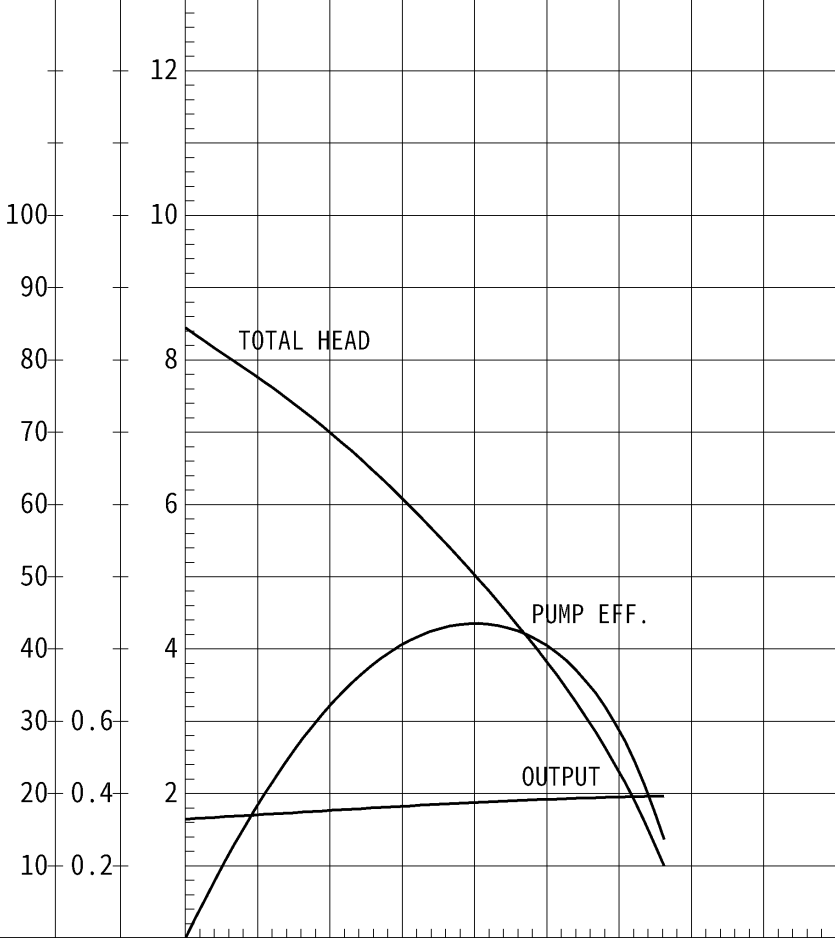


		No. 図番		A-15302-4	
予想性能曲線図				PUMP PERFORMANCE CURVES	
TYPE 名 称		汚物用水中ノンクロックポンプ		MODEL 型 式	
		50B4.4 -63		FREQUENCY 周波数	
				60 Hz	
CUSTOMER'S NAME 御注文先					
殿					
EQUIPMENT TITLE 機器名称					
No.					
		標 準 仕 様		STANDARD SPECIFICATIONS	
		御 注 文 仕 様		REQUIRED SPECIFICATIONS	
口 径 : DISCHARGE BORE		50		mm	
全揚程 : TOTAL HEAD		4.5		m	
吐出し量 : CAPACITY		0.21		m ³ /min	
出 力 : MOTOR OUTPUT		0.4		kW	
相×電圧 : PHASE×VOLTAGE		3 φ × 200		V	
電 流 : CURRENT		2.1		A	
極数 : POLES / 回転速度 : SPEED OF ROTATION		4 P / S.S.1800		min ⁻¹	
始動方式 : STARTING METHOD		じか入始動			
耐熱クラス : INSULATION CLASS		E			
				REMARKS:	
 The graph displays three performance curves for the pump. The x-axis represents Capacity (吐出し量) in m³/min, ranging from 0 to 0.6. The left y-axis represents Head (全揚程) in meters (m), ranging from 0 to 12. The right y-axis represents Pump Efficiency (ポンプ効率) in percent (%), ranging from 0 to 100. The 'TOTAL HEAD' curve starts at approximately 8.5 m at 0 m³/min and decreases to about 1.5 m at 0.35 m³/min. The 'PUMP EFF.' curve starts at 0%, peaks at approximately 45% efficiency at 0.2 m³/min, and then decreases. The 'OUTPUT' curve starts at approximately 0.15 kW at 0 m³/min and increases to about 0.2 kW at 0.35 m³/min.					
%	kW	m	CAPACITY 吐出し量		
PUMP EFF. ポンプ効率	MOTOR OUTPUT 出力	TOTAL HEAD 全揚程			
株式会社 鶴見製作所			TSURUMI MFG. CO., LTD.		