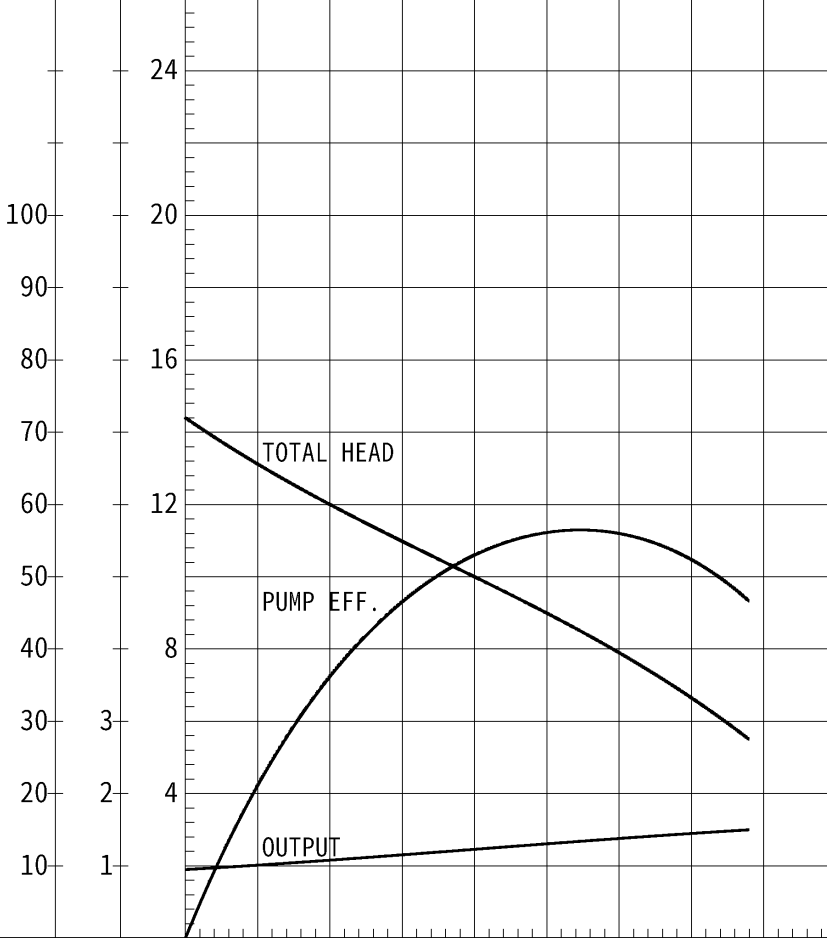


		No. 図番		A-29782-2	
予想性能曲線図 PUMP PERFORMANCE CURVES					
TYPE 名 称		汚物用水中ノンクロッグポンプ		MODEL 型 式	
		80B41.5H -64		FREQUENCY 周波数	
				60 Hz	
CUSTOMER'S NAME 御注文先					
殿					
EQUIPMENT TITLE 機器名称					
No.					
		標 準 仕 様 STANDARD SPECIFICATIONS		御 注 文 仕 様 REQUIRED SPECIFICATIONS	
口 径 : DISCHARGE BORE		80 mm		65 mm	
全揚程 : TOTAL HEAD		7.5 m		m	
吐出し量 : CAPACITY		0.6 m ³ /min		m ³ /min	
出 力 : MOTOR OUTPUT		1.5 kW		kW	
相×電圧 : PHASE×VOLTAGE		3 φ × 200 V		φ × V	
電 流 : CURRENT		7.3 A		A	
極数 : POLES / 回転速度 : SPEED OF ROTATION		4 P / S.S.1800 min ⁻¹		P / min ⁻¹	
始動方式 : STARTING METHOD		じか入始動			
耐熱クラス : INSULATION CLASS		F			
				REMARKS:	
 The graph plots three performance metrics against capacity (m³/min) on the x-axis (0 to 1.2). The left y-axis has two scales: one for head (m) from 10 to 24, and one for efficiency (%) from 10 to 100. The 'TOTAL HEAD' curve starts at approximately 7.5 m at 0 capacity and decreases linearly to about 2.8 m at 0.8 m³/min. The 'PUMP EFF.' curve starts at 0% at 0 capacity, rises to a peak of about 55% at 0.5 m³/min, and then declines to about 45% at 0.8 m³/min. The 'OUTPUT' curve starts at 0 kW at 0 capacity and increases linearly to about 1.5 kW at 0.8 m³/min.					
%	kW	m	CAPACITY 吐出し量		
PUMP EFF. ポンプ 効率	MOTOR OUTPUT 出力	TOTAL HEAD 全揚程			
0.2 0.4 0.6 0.8 1.0 1.2			m ³ /min		
株式会社 鶴見製作所			TSURUMI MFG. CO., LTD.		