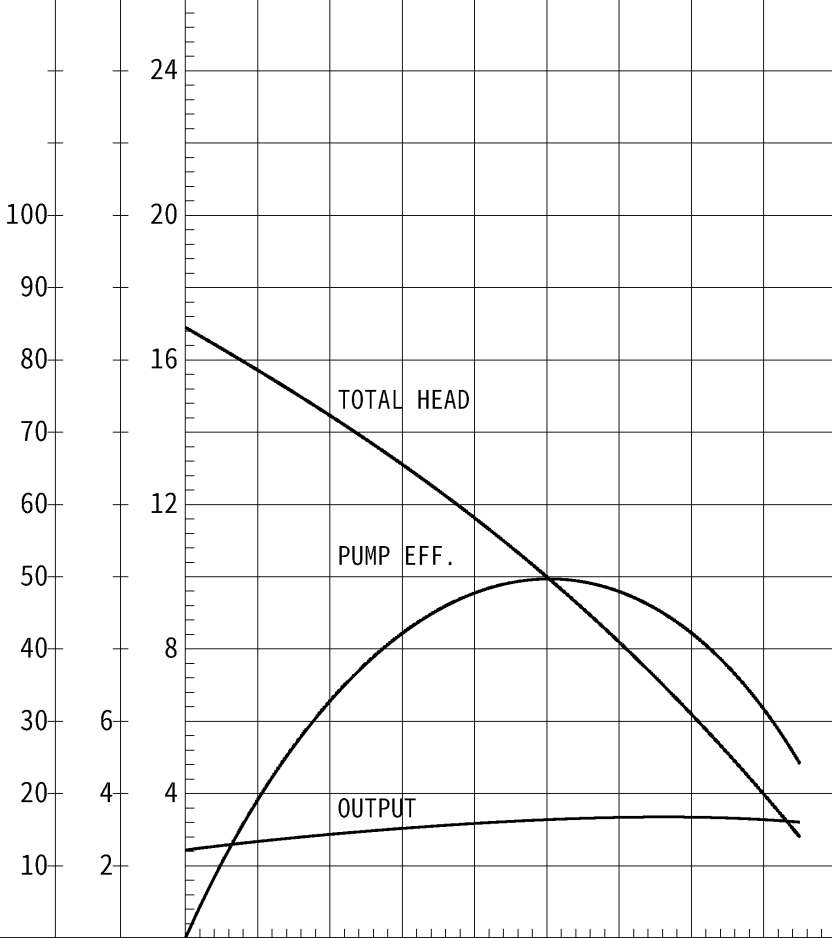


		No. 図番		A-27184-2A	
予想性能曲線図				PUMP PERFORMANCE CURVES	
TYPE 名 称		汚物用水中ノンクロッグポンプ		MODEL 型 式	
		80BA43.7 -62		FREQUENCY 周波数	
				60 Hz	
CUSTOMER'S NAME 御注文先					
殿					
EQUIPMENT TITLE 機器名称					
No.					
		標 準 仕 様		STANDARD SPECIFICATIONS	
		御 注 文 仕 様		REQUIRED SPECIFICATIONS	
口 径 : DISCHARGE BORE		80 mm		100 mm	
全揚程 : TOTAL HEAD		10 m		m	
吐出し量 : CAPACITY		1 m ³ /min		m ³ /min	
出 力 : MOTOR OUTPUT		3.7 kW		kW	
相×電圧 : PHASE×VOLTAGE		3 φ × 200 V		φ × V	
電 流 : CURRENT		15.2 A		A	
極数 : POLES / 回転速度 : SPEED OF ROTATION		4 P / S.S.1800 min ⁻¹		P / min ⁻¹	
始動方式 : STARTING METHOD		じか入始動			
耐熱クラス : INSULATION CLASS		F			
				REMARKS:	
 The graph plots three performance metrics against capacity (m³/min). The left y-axis has two scales: one for head (m) from 10 to 24, and one for efficiency (%) from 20 to 100. The x-axis ranges from 0 to 2.4 m³/min. The 'TOTAL HEAD' curve starts at approximately 16.5 m at 0 m³/min and decreases linearly to about 14.5 m at 1.7 m³/min. The 'PUMP EFF.' curve starts at 0% at 0 m³/min, peaks at approximately 50% efficiency at 1.1 m³/min, and then declines. The 'OUTPUT' curve starts at approximately 2.5 kW at 0 m³/min and increases slightly to about 3.5 kW at 1.7 m³/min.					
%	kW	m	CAPACITY 吐出し量		
PUMP EFF. ポンプ 効率	MOTOR OUTPUT 出力	TOTAL HEAD 全揚程			
			TSURUMI MFG. CO., LTD.		