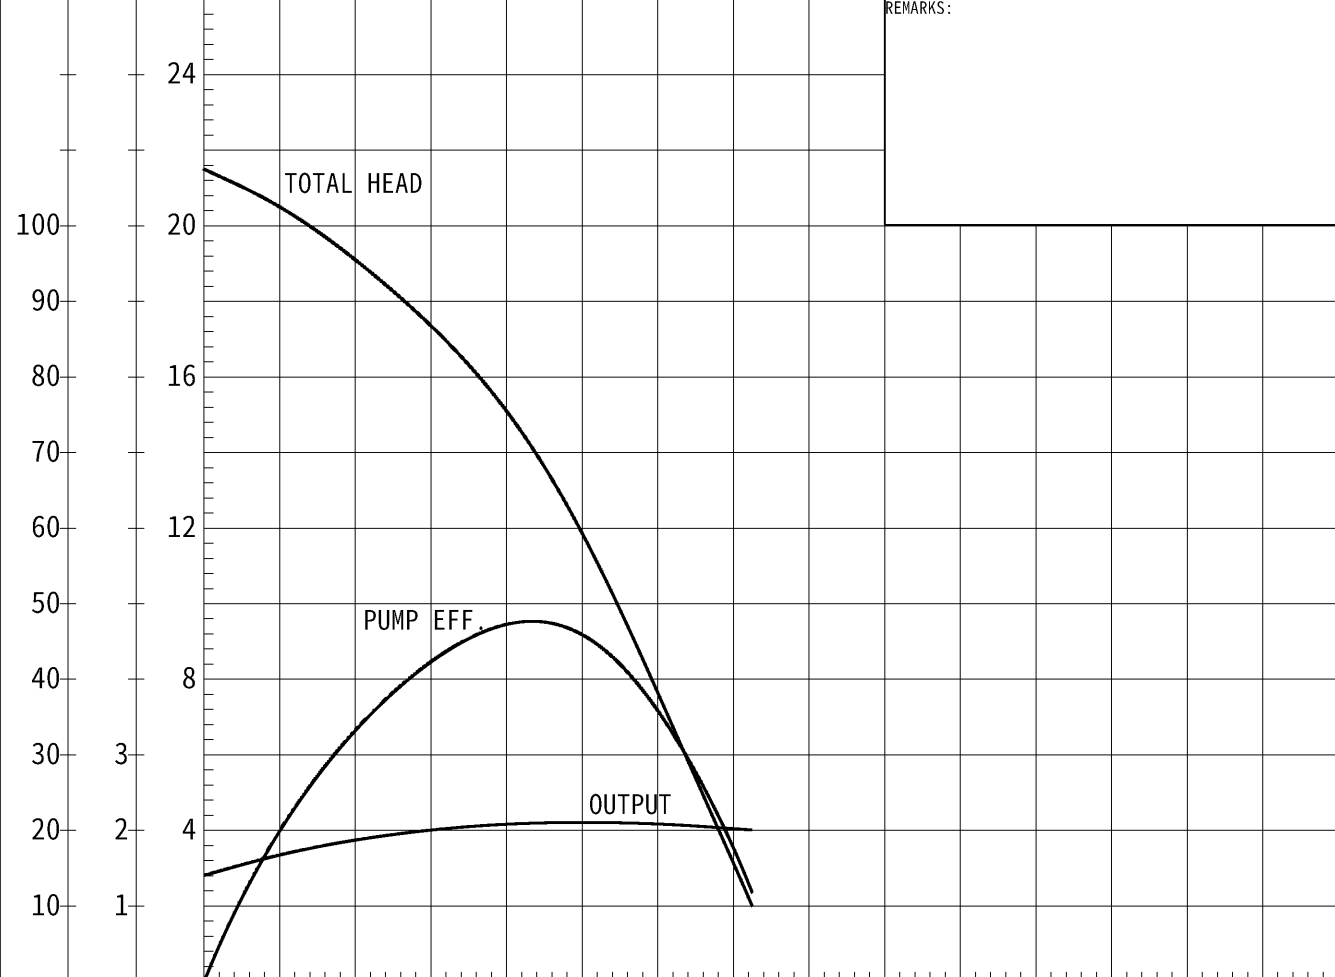


		No. 図番		A-18042-4W	
予想性能曲線図 PUMP PERFORMANCE CURVES					
TYPE 名 称		汚物用水中ハイスピンポンプ		MODEL 型 式	
		80PUTW22.2 -61		FREQUENCY 周波数	
				60 Hz	
CUSTOMER'S NAME 御注文先					
殿					
EQUIPMENT TITLE 機器名称					
No.					
		標 準 仕 様		STANDARD SPECIFICATIONS	
口 径		DISCHARGE BORE		80 mm	
全揚程		TOTAL HEAD		14.5 m	
吐出し量		CAPACITY		0.4 m³/min	
出 力		MOTOR OUTPUT		2.2 kW	
相×電圧		PHASE×VOLTAGE		3 φ × 200 V	
電 流		CURRENT		9.3 A	
極数: POLES		回 転 速 度: SPEED OF ROTATION		2 P / S.S.3600 min⁻¹	
始動方式		STARTING METHOD		じか入始動	
耐熱クラス		INSULATION CLASS		E	
REMARKS:					
 The graph plots three performance metrics against capacity (m³/min). The left y-axis has two scales: one for head (m) from 10 to 24, and one for efficiency/output from 1 to 100. The x-axis represents capacity from 0 to 1.2 m³/min. The 'TOTAL HEAD' curve starts at approximately 22m at 0 m³/min and decreases to about 10m at 0.7 m³/min. The 'PUMP EFF.' curve starts at 0, peaks at approximately 45% efficiency at 0.45 m³/min, and then declines. The 'OUTPUT' curve starts at approximately 1.5 kW at 0 m³/min, peaks at about 2.2 kW at 0.6 m³/min, and then slightly declines.					
%	kW	m	CAPACITY 吐出し量		
PUMP EFF.	MOTOR OUTPUT	TOTAL HEAD			
ポンプ効率	出力	全揚程			
株式会社 鶴見製作所			TSURUMI MFG. CO., LTD.		