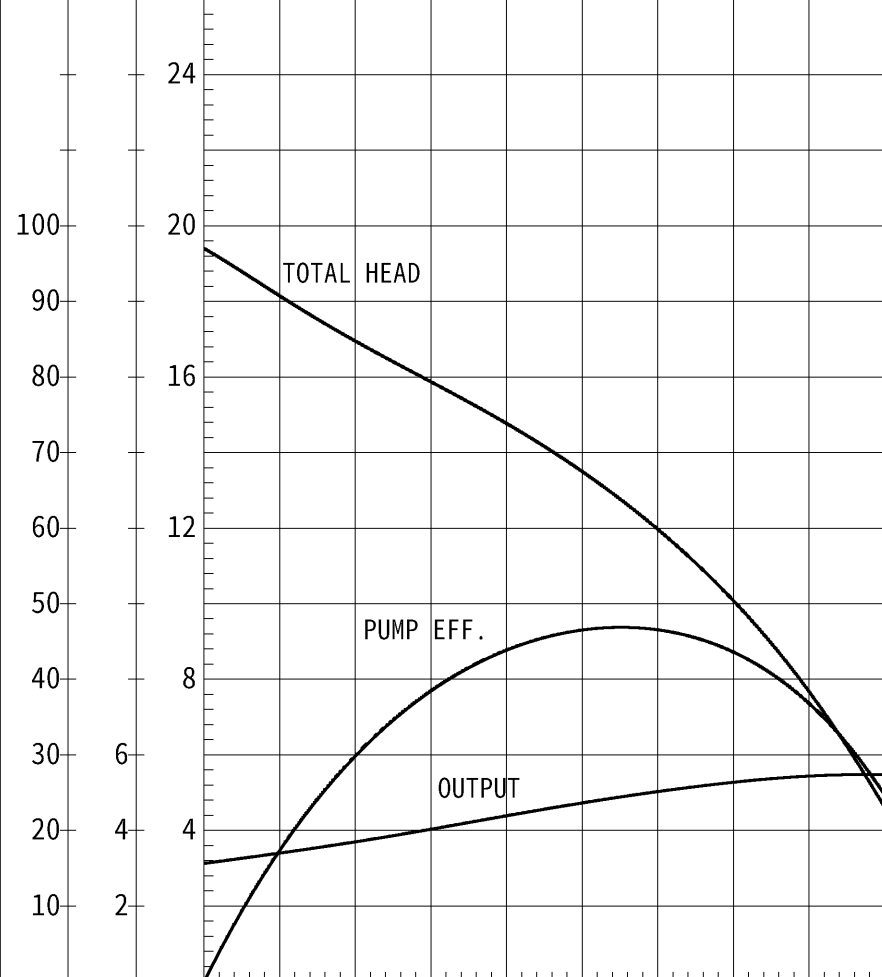


		No. 図番		A-24201-3T	
予想性能曲線図 PUMP PERFORMANCE CURVES					
TYPE 名 称		汚物用水中ハイスピンポンプ		MODEL 型 式 TOS80U45.5 -56	
				FREQUENCY 周波数 50 Hz	
CUSTOMER'S NAME 御注文先 殿					
EQUIPMENT TITLE 機器名称 No.					
		標 準 仕 様 STANDARD SPECIFICATIONS		御 注 文 仕 様 REQUIRED SPECIFICATIONS	
口 径 : DISCHARGE BORE		80 mm		mm	
全揚程 : TOTAL HEAD		13.5 m		m	
吐出し量 : CAPACITY		1.0 m³/min		m³/min	
出 力 : MOTOR OUTPUT		5.5 kW		kW	
相×電圧 : PHASE×VOLTAGE		3 φ × 200 V		φ × V	
電 流 : CURRENT		24.3 A		A	
極数 : POLES / 回転速度 : SPEED OF ROTATION		4 P / S.S.1500 min⁻¹		P / min⁻¹	
始動方式 : STARTING METHOD		じか入始動			
耐熱クラス : INSULATION CLASS		F			
 Graph showing performance curves for the pump. The X-axis represents Capacity (吐出し量) in m³/min, ranging from 0 to 2.4. The left Y-axis represents Head (全揚程) in meters (m), ranging from 10 to 24. The right Y-axis represents Pump Efficiency (ポンプ効率) in percent (%), ranging from 10 to 100. The Output curve (OUTPUT) shows the motor output in kW, ranging from 2 to 6. The Total Head curve (TOTAL HEAD) shows the total head in meters, decreasing from approximately 20m at 0 m³/min to 10m at 2.0 m³/min. The Pump Efficiency curve (PUMP EFF.) shows the pump efficiency in percent, peaking at approximately 45% around 1.2 m³/min.				REMARKS:	
%	kW	m	CAPACITY 吐出し量		
PUMP EFF. ポンプ効率	MOTOR OUTPUT 出力	TOTAL HEAD 全揚程	m³/min		
株式会社 鶴見製作所			TSURUMI MFG. CO., LTD.		