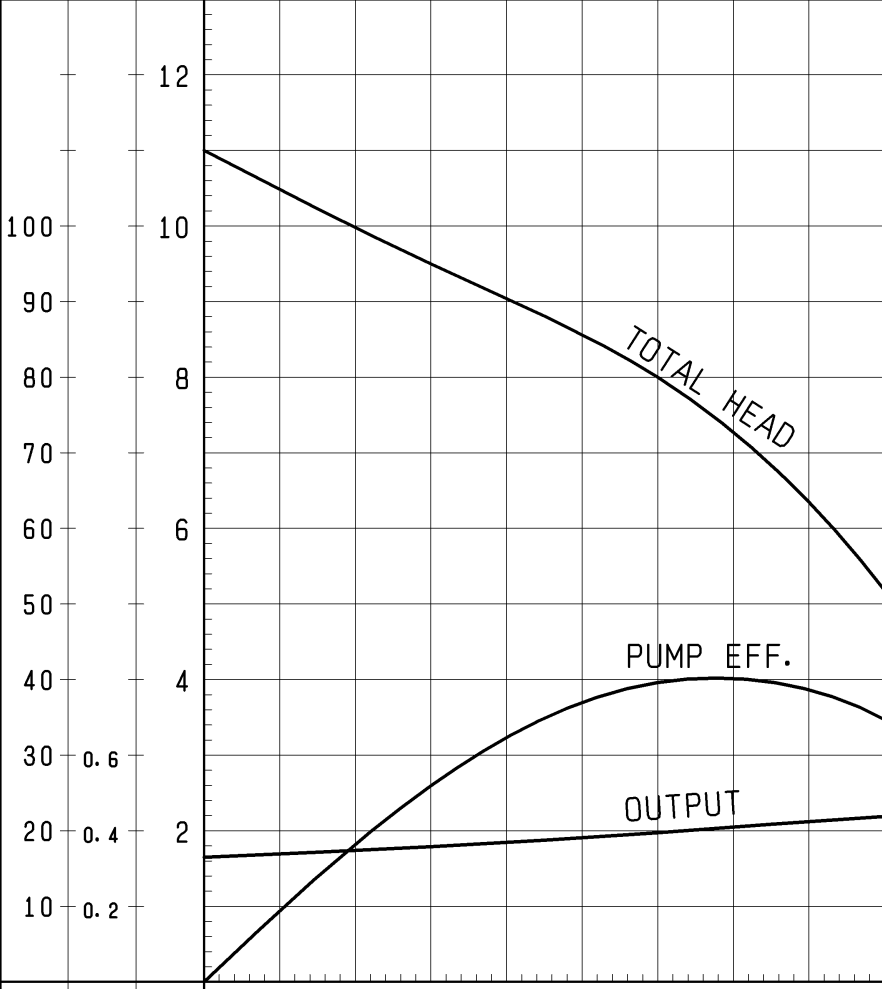


		NO. 図番		J4-36745-1	
性能曲線図 PUMP PERFORMANCE CURVES					
TYPE 名 称		低水位排水用水中ハイスピンポンプ		MODEL 型 式	
		LSRE2. 4J -51		FREQUENCY 周波数 50 Hz	
CUSTOMER'S NAME 御注文先 殿					
EQUIPMENT TITLE 機器名称 NO.					
		標 準 仕 様		御注文仕様	
		STANDARD SPECIFICATIONS		REQUIRED SPECIFICATIONS	
口 径 : DISCHARGE BORE		mm		50 mm	
全揚程 : TOTAL HEAD		m		8 m	
吐出し量 : CAPACITY		m ³ /min		0.12 m ³ /min	
出 力 : MOTOR OUTPUT		kW		0.48 kW	
相×電圧 : PHASE × VOLTAGE		φ × V		1 φ × 200 V	
電 流 : CURRENT		A		3.3 A	
極数: POLES / 回転数: REVOLUTION		P / min ⁻¹		2 P / S. S. 3000 min ⁻¹	
始動方式 : STARTING METHOD				コンデンサ運転	
絶縁階級 : INSULATION CLASS				E	
				REMARKS:	
 The graph plots three performance metrics against Capacity (m³/min) on the x-axis. The left y-axis has two scales: one for Head (m) from 0 to 12, and one for Efficiency (%) from 0 to 100. The right y-axis has a scale for Output (kW) from 0 to 0.6. The 'TOTAL HEAD' curve starts at approximately 11.2 m at 0 capacity and decreases to about 1.5 m at 0.25 m³/min. The 'PUMP EFF.' curve starts at 0, peaks at approximately 40% efficiency at 0.15 m³/min, and then declines. The 'OUTPUT' curve starts at approximately 0.15 kW at 0 capacity and increases to about 0.25 kW at 0.25 m³/min.					
%	kW	m	CAPACITY 吐出し量		
PUMP EFF. ポンプ効率	MOTOR OUTPUT 出力	TOTAL HEAD 全揚程	m ³ /min		
株式会社 鶴見製作所			TSURUMI MFG. CO., LTD.		