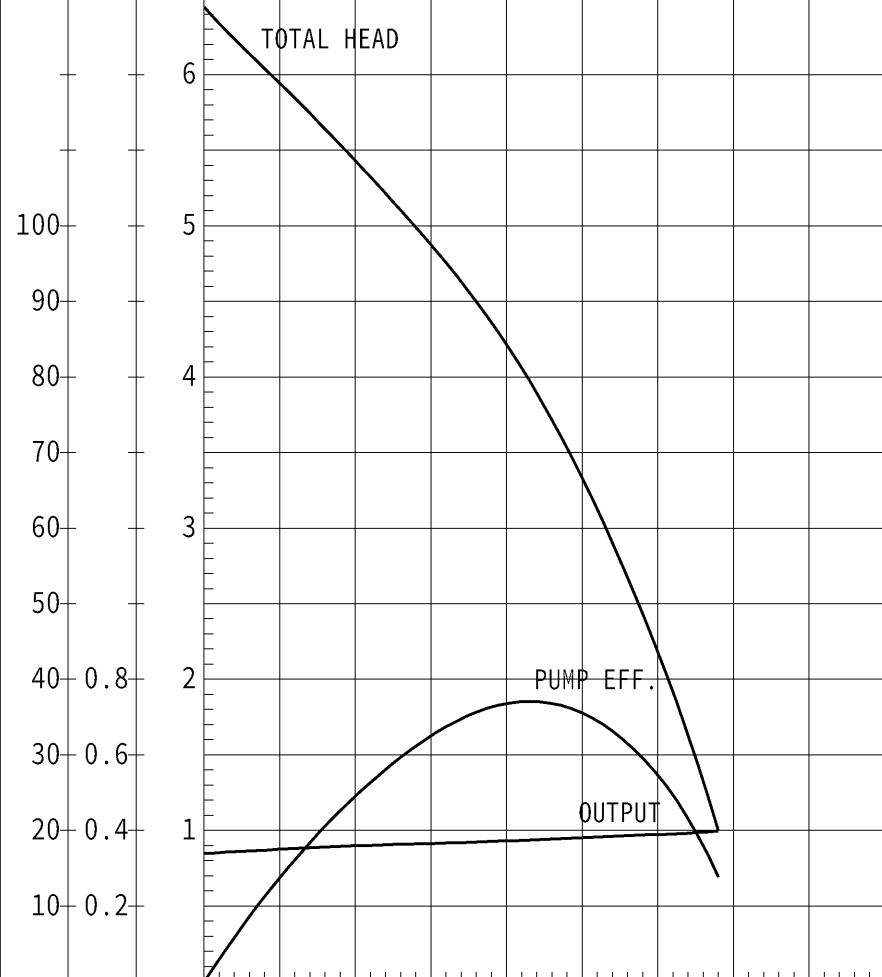


		No. 図番		A-15349-2	
予想性能曲線図 PUMP PERFORMANCE CURVES					
TYPE 名 称		汚物用水中ハイスピンポンプ		MODEL 型 式	
		50U4.4 -55 TOS50U4.4 -55		FREQUENCY 周波数	
				50 Hz	
CUSTOMER'S NAME 御注文先					
殿					
EQUIPMENT TITLE 機器名称					
No.					
		標 準 仕 様 STANDARD SPECIFICATIONS		御 注 文 仕 様 REQUIRED SPECIFICATIONS	
口 径 : DISCHARGE BORE		50 mm			
全揚程 : TOTAL HEAD		4.5 m			
吐出し量 : CAPACITY		0.18 m³/min			
出 力 : MOTOR OUTPUT		0.4 kW			
相×電圧 : PHASE×VOLTAGE		3 φ × 200 V		φ × V	
電 流 : CURRENT		2.3 A		A	
極数 : POLES / 回転速度 : SPEED OF ROTATION		4 P / S.S.1500 min⁻¹		P / min⁻¹	
始動方式 : STARTING METHOD		じか入始動			
耐熱クラス : INSULATION CLASS		E			
 The graph plots three performance metrics against capacity (m³/min). The left y-axis has two scales: one for head (m) from 0 to 6, and one for efficiency/output from 0 to 100. The x-axis ranges from 0 to 0.6 m³/min. The 'TOTAL HEAD' curve starts at approximately 6.5 m at 0 m³/min and decreases to about 1.5 m at 0.35 m³/min. The 'PUMP EFF.' curve starts at 0, peaks at approximately 38% efficiency (0.38 on the 0-100 scale) at a capacity of about 0.22 m³/min, and then declines. The 'OUTPUT' curve starts at approximately 15% efficiency (0.15 on the 0-100 scale) at 0 m³/min and remains relatively flat, reaching about 20% efficiency at 0.35 m³/min.				REMARKS:	
%	kW	m	CAPACITY 吐出し量		
PUMP EFF. ポンプ効率	MOTOR OUTPUT 出力	TOTAL HEAD 全揚程	m³/min		
株式会社 鶴見製作所			TSURUMI MFG. CO., LTD.		