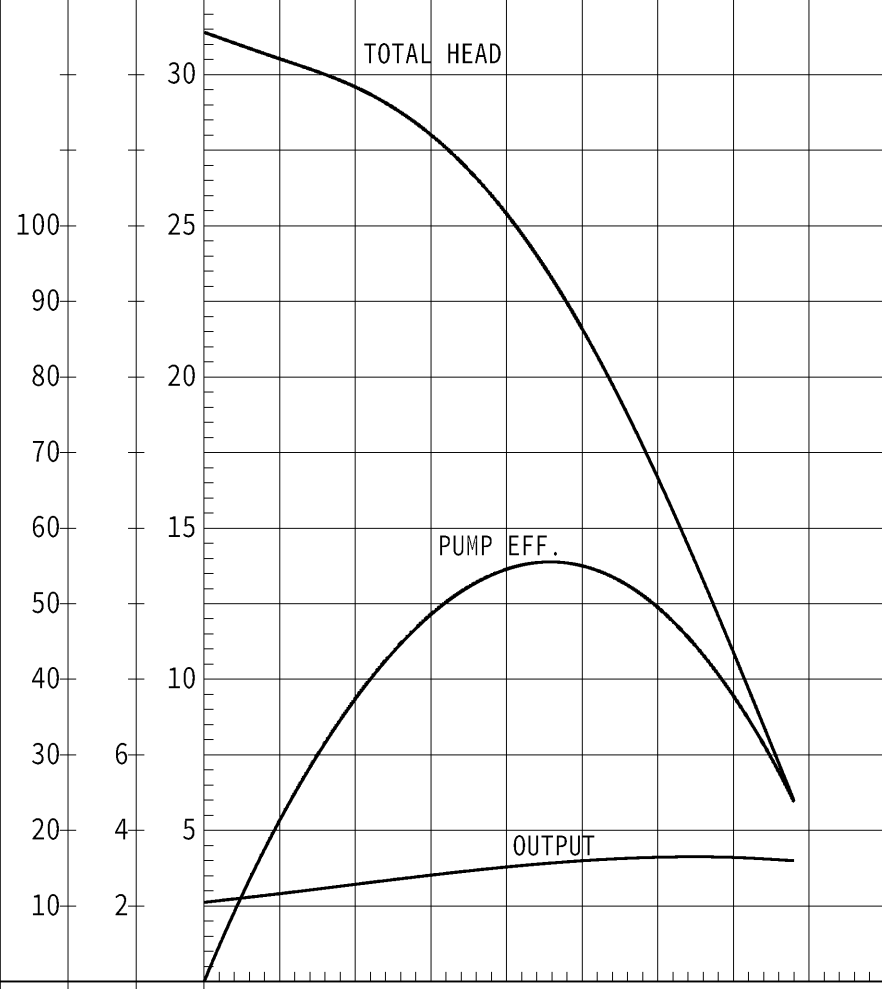


		No. 図番		A-19440-2	
予想性能曲線図 PUMP PERFORMANCE CURVES					
TYPE 名 称		汚水用水中うず巻ポンプ		MODEL 型 式 65PSF(A/W)23.7 -51	
				FREQUENCY 周波数 50 Hz	
CUSTOMER'S NAME 御注文先 殿					
EQUIPMENT TITLE 機器名称 No.					
		標 準 仕 様 STANDARD SPECIFICATIONS		御 注 文 仕 様 REQUIRED SPECIFICATIONS	
口 径 : DISCHARGE BORE		65 mm		mm	
全揚程 : TOTAL HEAD		24 .5 m		m	
吐出し量 : CAPACITY		0 .4 m³/min		m³/min	
出 力 : MOTOR OUTPUT		3 .7 kW		kW	
相×電圧 : PHASE×VOLTAGE		3 φ × 200 V		φ × V	
電 流 : CURRENT		15 .0 A		A	
極数 : POLES / 回転速度 : SPEED OF ROTATION		2 P / S.S.3000 min ⁻¹		P / min ⁻¹	
始動方式 : STARTING METHOD		じか入始動			
耐熱クラス : INSULATION CLASS		E			
 Graph showing performance curves for the pump. The X-axis represents Capacity (吐出し量) in m³/min, ranging from 0 to 1.2. The left Y-axis represents Head (全揚程) in meters (m), ranging from 0 to 30. The right Y-axis represents Pump Efficiency (ポンプ効率) in percent (%), ranging from 0 to 100. The Output (出力) curve is shown in kW. The Total Head (全揚程) curve starts at approximately 32m at 0 m³/min and decreases to about 24m at 0.8 m³/min. The Pump Efficiency (ポンプ効率) curve starts at 0% at 0 m³/min, peaks at approximately 55% at 0.5 m³/min, and decreases to about 30% at 0.8 m³/min. The Output (出力) curve starts at approximately 2.5 kW at 0 m³/min and increases to about 4.5 kW at 0.8 m³/min.				REMARKS:	
%	kW	m	CAPACITY 吐出し量		
PUMP EFF. ポンプ効率	MOTOR OUTPUT 出力	TOTAL HEAD 全揚程	m³/min		
株式会社 鶴見製作所			TSURUMI MFG. CO., LTD.		