

MIC-711D-ON

AI Developer Kit Based on NVIDIA® Jetson Orin™ Nano

NEW



Features


- Open-frame carrier design with thermal solution
- Embedded with NVIDIA® Jetson Orin™ Nano up to 67 TOPS
- Supports 1 x GbE, 2 x USB 3.2 Gen 1 (5 Gbit/s)
- Supports 1 x mPCIe, 1 x M.2 3052, 1 x M.2 2280
- Supports Allxon 24/7 remote monitoring and OTA deployment
- Supports Super mode with Jetpack 6.2 and above

Specifications

		NVIDIA® Jetson Orin™ Nano
Processor System	CPU	6-core Arm® Cortex®-A78AE v8.2 64-bit CPU 1.5MB L2 + 4MB L3
	GPU	8G: 1024-core NVIDIA Ampere architecture GPU with 32 Tensor Cores 4G: 512-core NVIDIA Ampere architecture GPU with 16 Tensor Cores
	Memory	8G: 8GB LPDDR5 4G: 4GB LPDDR5
	Flash	-
I/O	Ethernet	1 x 10/100/1000 Mbps
	Display	HDMI (Max. resolution 3840x2160 @ 60Hz)
	USB	External: 2 x USB 3.2 Gen 2, 1 x USB 2.0 Internal: 1 x USB 2.0 (by pin header)
	OTG USB	1 x Micro USB
Expansion	Mini PCIe	1 x mPCIe (Signal: PCIe + USB 2.0)
	M.2	1 x M.2 3052 (B-Key, Signal: USB)
	GMSL (Optional)	2-ch GMSL2.0 with FAKRA connectors
	SIM	2 x Nano SIM slots
Storage	M.2	1 x M.2 2280 (M-Key, NVMe, Signal: PCIe x4)
	SD Card	1 x Micro SD
Fan	Dimension	60 x 60 x 13 mm (2.36" x 2.36" x 0.51")
	RPM	5400 RPM
Power	Mode	Terminal block, 2-pin, AT
	Input Voltage	12 V _{DC}
Mechanical	Dimensions (W x D x H)	125 x 125 x 51 mm (5.1" x 5.1" x 1.8")
	Weight	0.8 kg (1.76 lb)
	Installation	Desktop
BSP	Jetpack	Above 5.1

Dimensions

Unit: mm

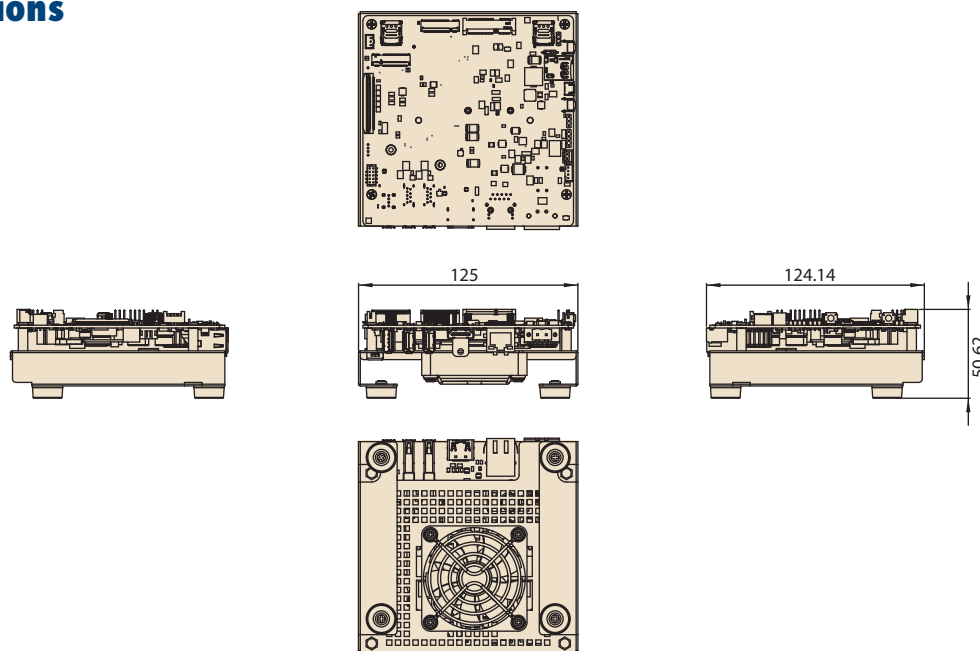

Ordering Information

Part Number	NVIDIA Module	NVIDIA Module Memory	NVIDIA Module eMMC	NVMe	Super mode support
MIC-711D-ON3A1	Orin Nano	8G	NA	128G(pre-installed system BSP)	Yes (needs to update to JetPack 6.2)
MIC-711D-ON2A1	Orin Nano	4G	NA	128G(pre-installed system BSP)	Yes (needs to update to JetPack 6.2)
MIC-711D-ON3A2	Orin Nano	8G	NA	128G(pre-installed system BSP)	Yes (default)
MIC-711D-ON2A2	Orin Nano	4G	NA	128G(pre-installed system BSP)	Yes (default)


Packing List

Part Number	Description	Quantity
MIC-711D-ON	AI developer kit	1
1652002202	Power connector — 2-pin	1
1700023619-01	Micro USB cable for system recovery	1
1930005673-11	M.2 screw	2
1930008089	Mini PCIe screw	2


Optional

Part Number	Description
96PSA-A65W19P2-1	Power Adapter 100-240V 65W 19V
1700001524	Power Cord UL 3P 10A 125V 183 cm (US)
170203183C	Power Cord EU 3P 2.5A 250V 183 cm (EU)
170203180A	Power Cord BSI 3P 2.5A 250V 183 cm (UK)
1702031836	Power Cord SAA 3P 10A 250V 183 cm (AU)
1700008921	Power Cord PSE 3P 7A 125V 183 cm (Japan)
1700019146	Power Cord CCC 3P 2.5A 250V 183 cm (China)
98RV710AL00	Allxon OOB module
98R2711AL00	Allxon Bolt OOB module
MIC-FG-4G2C1	4ch GMSL SW video card


Front View

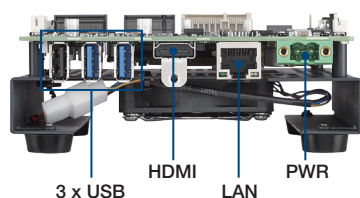

Back View

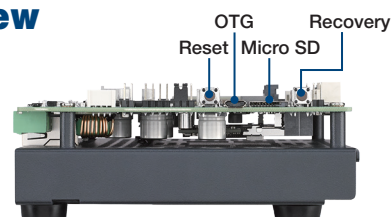

Top View

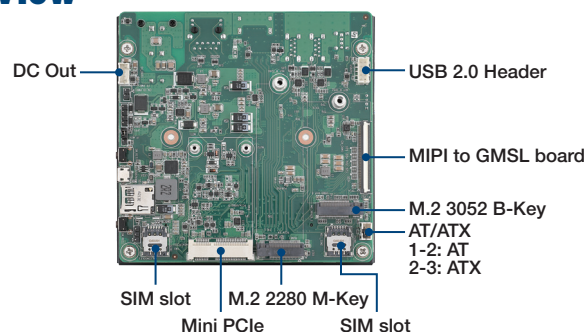

To support NVIDIA Jetson Orin Super Mode & BSP upgrade

Super ModeをサポートするSKUに関しては別製品型番となっています。現行モデルは JetPack5.1.2 のままとなります。

Super Mode 対応製品は JetPack 6.2 となり、対応する BSP がインストールされています。詳細に関しましては、下記の表をご参照ください。

Affected Model	Current JetPack version	Replacement Model to Support Super Mode	JetPack version	Note
MIC-711-ON2A1*	5.1.2	MIC-711-ON2A 2	6.2	BSP upgrade
MIC-711-ON3A1*	5.1.2	MIC-711-ON3A 2	6.2	BSP upgrade
MIC-711-OX3A1	5.1.2	MIC-711-OX3A 2	6.2	BOM changed
MIC-711-OX4A1	5.1.2	MIC-711-OX4A 2	6.2	BOM changed
MIC-711D-ON2A1*	5.1.2	MIC-711D-ON2A 2	6.2	BSP upgrade
MIC-711D-ON3A1*	5.1.2	MIC-711D-ON3A 2	6.2	BSP upgrade
MIC-711D-OX3A1	5.1.2	MIC-711D-OX3A 2	6.2	BOM changed
MIC-711D-OX4A1	5.1.2	MIC-711D-OX4A 2	6.2	BOM changed
MIC-713-ON2A1	5.1.2	MIC-713-ON2 B2	6.2	PCB Revision
MIC-713-ON3A1	5.1.2	MIC-713-ON3 B2	6.2	PCB Revision
MIC-713-OX3A1	5.1.2	MIC-713-OX3 B2	6.2	PCB Revision
MIC-713-OX4A1	5.1.2	MIC-713-OX4 B2	6.2	PCB Revision
MIC-713S-ON2A1	5.1.2	MIC-713S-ON2 B2	6.2	PCB Revision
MIC-713S-ON3A1	5.1.2	MIC-713S-ON3 B2	6.2	PCB Revision
MIC-713S-OX3A1	5.1.2	MIC-713S-OX3 B2	6.2	PCB Revision
MIC-713S-OX4A1	5.1.2	MIC-713S-OX4 B2	6.2	PCB Revision