


図面／規格  
【スプリングワッシャー（2号）】

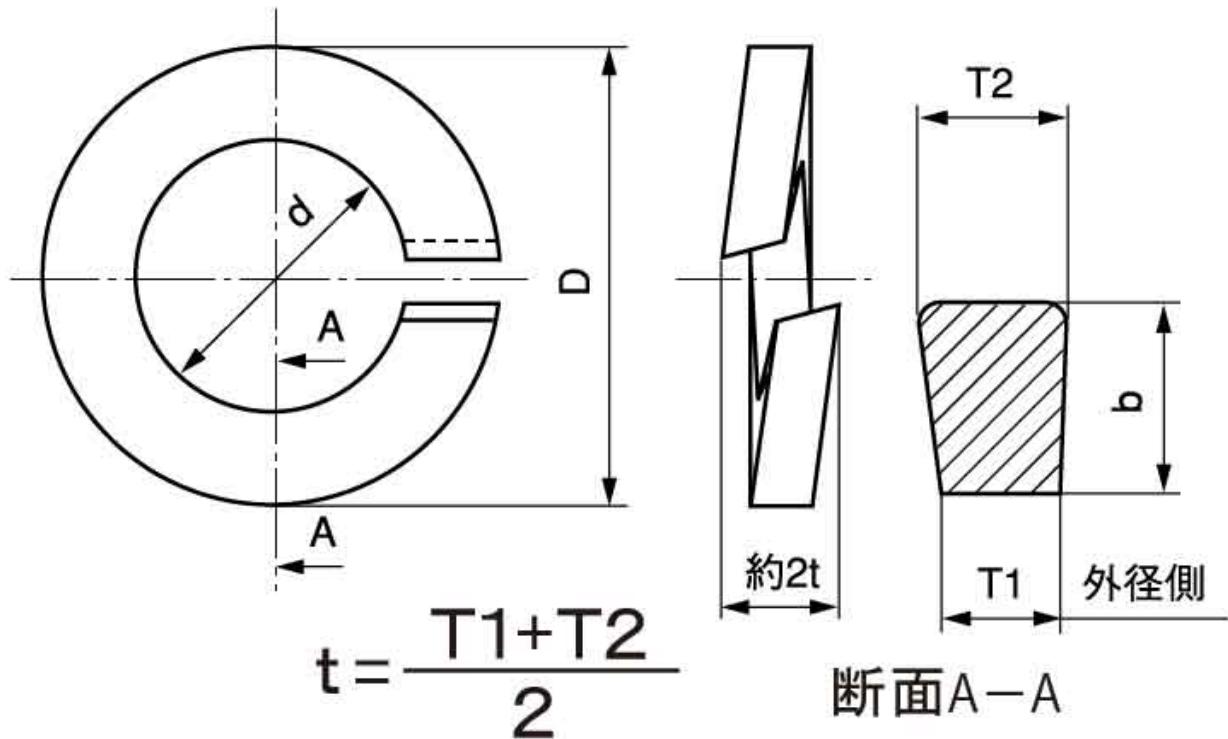

呼びa)	内径(d)		外径(D) (最大)	断面寸法(最小)	
	基準寸法	許容差		幅(b )	厚さ(t)
2	2.1	+0.25 0	4.4	0.9	0.5
2.3	2.4	+0.25 0	4.9	1.0	0.6
2.5	2.6	+0.3 0	5.2	1.0	0.6
2.6	2.7	+0.3 0	5.3	1.0	0.6
3	3.1	+0.3 0	5.9	1.1	0.7
(3.5)	3.6	+0.3 0	6.6	1.2	0.8
4	4.1	+0.4 0	7.6	1.4	1.0
(4.5)	4.6	+0.4 0	8.3	1.5	1.2
5	5.1	+0.4 0	9.2	1.7	1.3
6	6.1	+0.4 0	12.2	2.7	1.5
(7)	7.1	+0.4 0	13.4	2.8	1.6
8	8.2	+0.5 0	15.4	3.2	2.0
10	10.2	+0.5 0	18.4	3.7	2.5
12	12.2	+0.6 0	21.5	4.2	3.0
(14)	14.2	+0.6 0	24.5	4.7	3.5
16	16.2	+0.8 0	28.0	5.2	4.0
(18)	18.2	+0.8 0	31.0	5.7	4.6
20	20.2	+0.8 0	33.8	6.1	5.1
(22)	22.5	+1.0 0	37.7	6.8	5.6
24	24.5	+1.0 0	40.3	7.1	5.9
(27)	27.5	+1.2 0	45.3	7.9	6.8
30	30.5	+1.2 0	49.9	8.7	7.5
(33)	33.5	+1.4 0	54.7	9.5	8.2
36	36.5	+1.4 0	59.1	10.2	9.0
(39)	39.5	+1.4 0	63.1	10.7	9.5

呼びa)	内径(d)		外径(D) (最大)	断面寸法(最小)	
	基準寸法	許容差		幅(b )	厚さ(t)
42	45	+0 -1.4	65	10	8
45	48	+0 -1.5	72	12	9
48	51	+0 -1.5	75	12	9
52	55	+0 -1.5	79	12	9
56	60	+0 -0.2	85	12	9
60	63	+0 -0.2	88	12	9
64	68	+0 -0.3	92	12	9
68	72	+0 -0.3	96	12	9.2
72	76	+0 -0.3	100	12	9.2
76	80	+0 -0.3	106	12.6	9.2
80	85	+0 -0.4	111	12.6	9.2
90	95	+0 -0.4	121	12.6	9.2
100	105	+0 -0.4	131	12.6	9.2
W 1/4	6.5	+0.4 0	12.8	2.8	1.6
W 3/8	9.8	+0.5 0	17.8	3.6	2.4
W 7/16	11.4	+0.5 0	20.2	4	2.8
W 1/2	13	+0.6 0	22.7	4.4	3.2
W 5/8	16.2	+0.8 0	28	5.2	4.0
W 3/4	19.5	+0.8 0	32.7	5.9	4.8
W 7/8	22.5	+1.0 0	37.7	6.8	5.6
W 1'	26	+1.0 0	42.8	7.5	6.4
W 1-1/8	29.3	+1.2 0	47.9	8.3	7.1
W 1-1/4	32.5	+1.2 0	52.7	9.1	7.9
W 1-3/8	35.8	+1.4 0	57.8	9.9	8.7
W 1-1/2	39.5	+1.4 0	63.1	10.7	9.5