


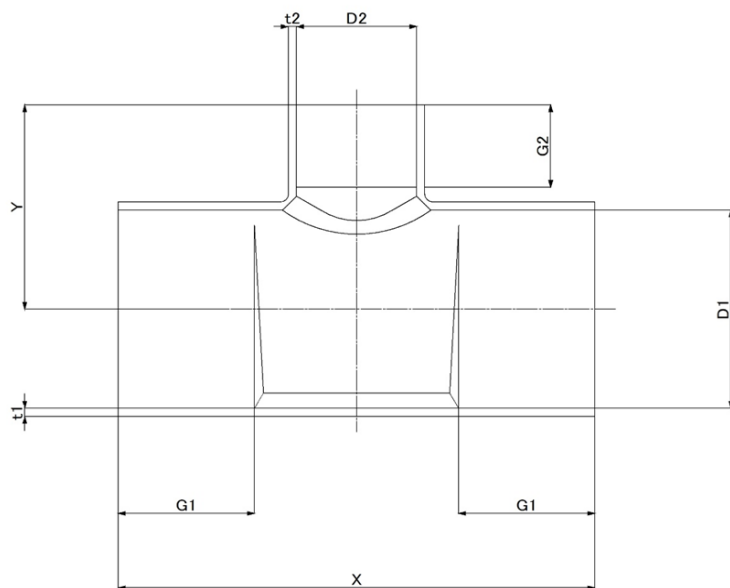

接合銅管基準外径 (mm)	接合部内径 (mm)				各部寸法 (mm)							
	ϕD_1		ϕD_2		G1. min	G2. min	X		Y		t 1.Min	t 2.Min
	最小値	最大値	最小値	最大値			基準値	公差	基準値	公差		
ϕD												
12.7 x 9.52	12.75	12.85	9.58	9.68	9	8	34	± 0.8	16	± 0.8	0.7	0.6
15.88 x 9.52	15.93	16.03	9.58	9.68	11	8	42	± 1.0	19	± 1.0	0.8	0.6
15.88 x 12.7	15.93	16.03	12.75	12.85	11	9	42	± 1.0	20	± 1.0	0.8	0.7
19.05 x 9.52	19.1	19.2	9.58	9.68	15	8	44	± 1.0	20.5	± 1.0	0.8	0.6
19.05 x 12.7	19.1	19.2	12.75	12.85	15	9	45	± 1.0	21.5	± 1.0	0.8	0.7
19.05 x 15.88	19.1	19.2	15.93	16.03	15	11	51	± 1.0	23.5	± 1.0	0.8	0.8
22.22 x 15.88	22.28	22.38	15.93	16.03	17	11	56	± 1.0	26	± 1.0	0.9	0.8
22.22 x 19.05	22.28	22.38	19.1	19.2	17	15	60	± 1.0	29	± 1.0	0.9	0.8
25.4 x 12.7	25.52	25.6	12.75	12.85	21	9	62	± 1.0	25	± 1.0	0.95	0.7
25.4 x 15.88	25.52	25.6	15.93	16.03	21	11	65	± 1.0	28	± 1.0	0.95	0.8
25.4 x 19.05	25.52	25.6	19.1	19.2	21	15	68	± 1.0	32	± 1.0	0.95	0.8
28.58 x 15.88	28.65	28.75	15.93	16.03	21	11	65	± 1.2	29.5	± 1.2	1.0	0.8
28.58 x 19.05	28.65	28.75	19.1	19.2	21	15	68	± 1.2	33	± 1.2	1.0	0.8
31.75 x 19.05	31.89	31.97	19.1	19.2	24	15	75	± 1.2	34.5	± 1.2	1.1	0.8
31.75 x 25.4	31.89	31.97	25.52	25.6	24	21	83	± 1.2	40.5	± 1.2	1.1	0.95
38.1 x 19.05	38.26	38.36	19.1	19.2	24	15	76.5	± 1.2	38	± 1.2	1.35	0.8
38.1 x 25.4	38.26	38.36	25.52	25.6	24	21	83	± 1.2	44	± 1.2	1.35	0.95
38.1 x 31.75	38.26	38.36	31.89	31.97	24	24	89.5	± 1.2	47	± 1.2	1.35	1.1

記号	品名	図番	材質	寸法	備考
1	りん脱酸銅		C1220T		
2	JIS H3401・JIS B8607 準拠				

尺度 Free				異形ティーズ