


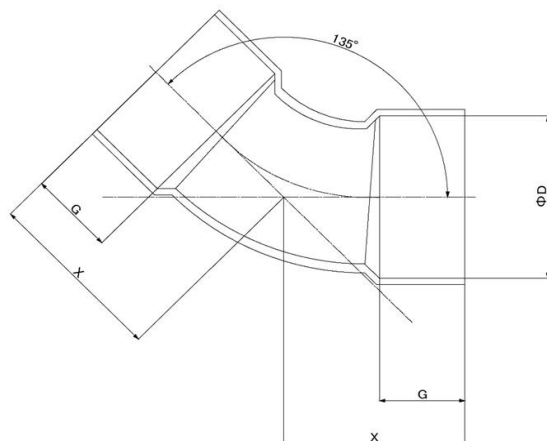

接合銅管 基準外径(mm)	接合部内径 (mm)		各 部 寸 法 (mm)			
			G. min	X		t .Min
				基準値	公差	
φD	最小値	最大値				
19.05	19.1	19.2	15.7	26.5	± 2.0	0.8
22.22	22.28	22.38	19.1	32.8	± 2.0	0.9
28.58	28.58	28.75	23.1	36.8	± 2.0	1.0
34.92	35	35.1	24.6	42	± 2.0	1.2

記号	品名	図番	材質	寸法	備考	
1	りん脱酸銅		C1220T			
2	JIS H3401準拠					

尺度	Free			45EA エルボー