


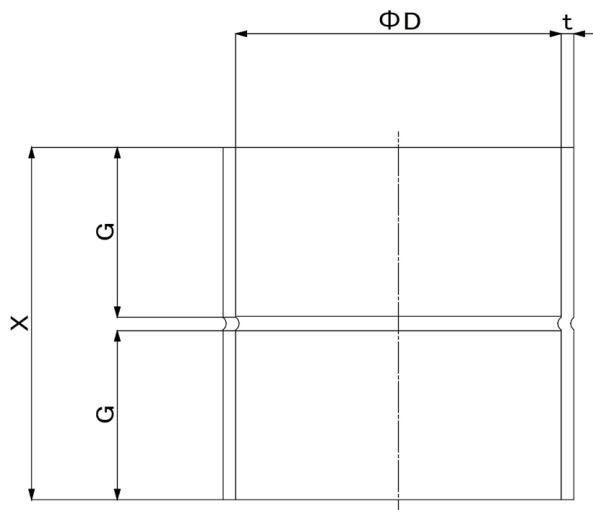

接合銅管 基準外径(mm)	接合部内径 (mm)		各 部 寸 法 (mm)			
			G. min	X		t .Min
ϕD	最小値	最大値		基準値	公差	
9.52	9.58	9.68	7.9	17.5	± 1.5	0.6
12.7	12.75	12.85	9.7	21.5	± 1.5	0.7
15.88	15.93	16.03	12.7	27.2	± 1.5	0.8
19.05	19.1	19.2	15.7	32.2	± 1.5	0.8
22.22	22.28	22.38	19.1	40	± 1.5	0.9
28.58	28.65	28.75	23.1	49	± 1.5	1.0
34.92	35	35.1	24.6	53.5	± 1.5	1.2
41.28	41.35	41.48	27.7	58	± 1.5	1.3

記号	品名	図番	材質	寸法	備考	
1	りん脱酸銅		C1220T			
2						

尺度 Free			ソケット