
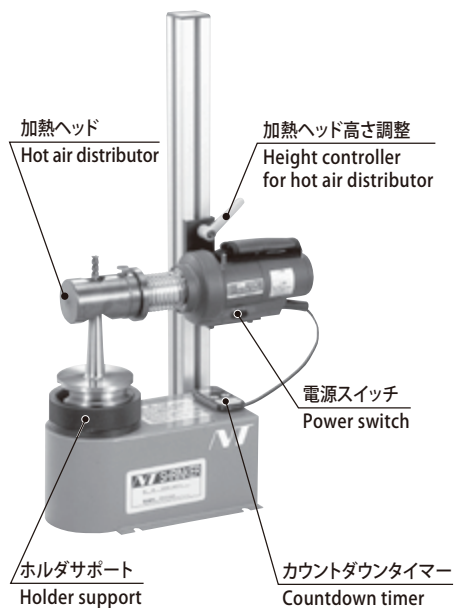


SRK-HA1, SRK-HB2

簡易型加熱装置 Economy Type Heater

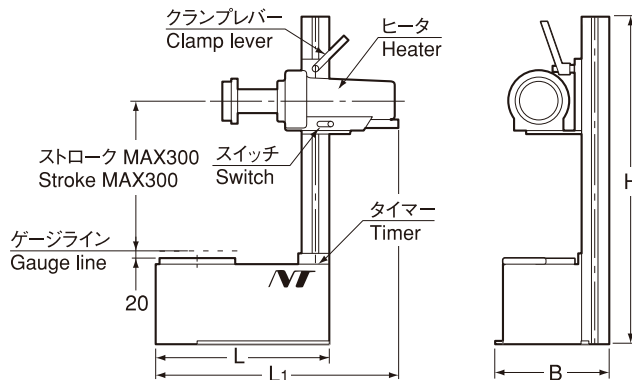

商品コード Code	型式 Model	L	B	H	L1	電圧 Voltage	ワット Watt	kg
3064 00000111	SRK- HA1	275	190	660	380	100V (単相 Single phase)	1200W	7.5
3064 00000121	SRK- HB2-200	275	190	660	416	200V (単相 Single phase)	3000W	7.5
3064 00000124	SRK- HB2-220	275	190	660	416	220V (単相 Single phase)	3000W	7.5
3064 00000125	SRK- HB2-230	275	190	660	416	230V (単相 Single phase)	3000W	7.5

●付属品

電源コード 3m、カウントダウンタイマー及び耐熱グローブ（加熱ヘッド、ホルダサポートは別途ご注文ください。）


●Accessories

Power cord (3m), countdown timer and a pair of heat- resistant gloves are included. (Hot air distributor and holder support are sold separately.)

⚠ SR ※ 6A、SR ※ 8A の加熱には使用できません。 Not applicable for SR ※ 6A and SR ※ 8A.


アクセサリ Accessories

SRK-HA-HE 簡易型加熱ヘッド Hot air distributor (Heating head)



型式 Model	チャックタイプ Chuck type	刃具シャック径 Tool Shank Dia.	D	d	L
SRK-HA -HE26	DIN規格 (SRD) DIN standard (SRD)	ø10 ~ ø12	27	43	85
SRK-HA -HE32	DIN規格 (SRD) DIN standard (SRD)	ø14 ~ ø20	39	61	93
SRK-HA -HE40	DIN規格 (SRD) DIN standard (SRD)	ø25 ~ ø32	59	79	122

SRK-SP ホルダサポート Holder support



型式 Model	d	A	B
SRK-SP -HSK 25	25.3	20	27
SRK-SP -HSK 32	32.3	20	27
SRK-SP -HSK 40	40.3	20	27
SRK-SP -BT30	46.3	20	27
SRK-SP -HSK 50	50.3	20	27
SRK-SP -HSK 63/BT40	63.8	20	27
SRK-SP -HSK 80	80.3	20	27
SRK-SP -HSK100/BT50	100.3	20	30