


図面／規格
【ITハンガー（ITWタイプ）】

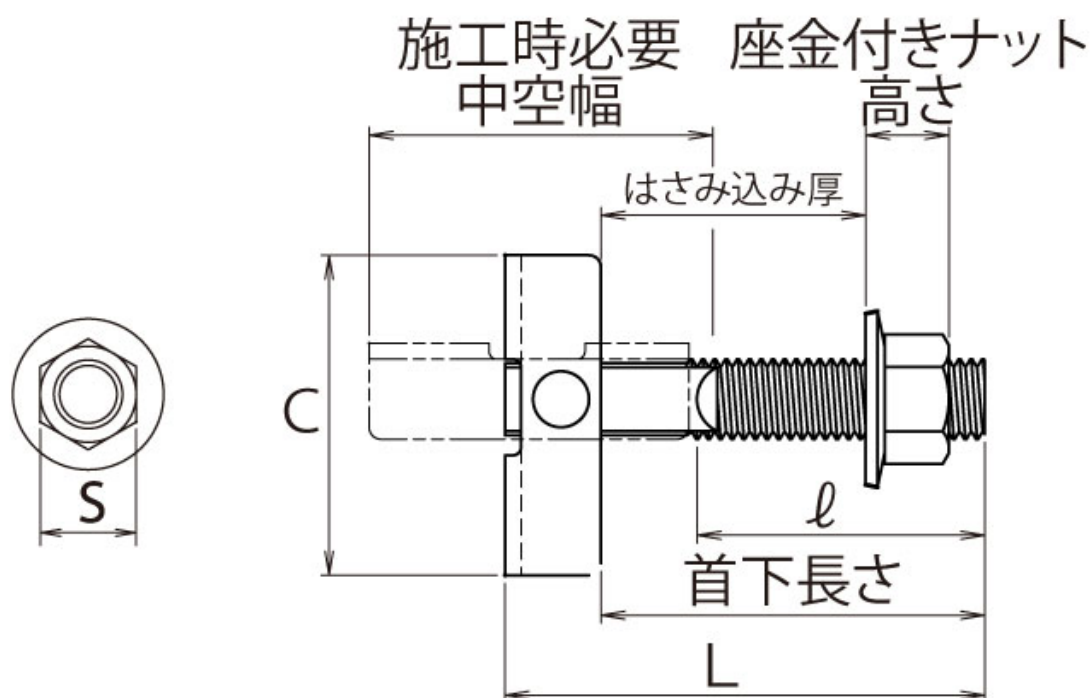

ねじの呼び	品番	全長 L	首下長さ	ねじ長さ ℓ	はさみ込み厚	座金付き ナット高さ	プレート 長さ C	座金付き ナット 二面幅 S	施工時必要 中空幅	穿孔径
M6	ITW-625S	25	18	12	6~8	6.5	20	10	23	9.5
M6	ITW-630S	30	23	17	6~13					
M6	ITW-640S	40	33	27	6~23					
M6	ITW-650S	50	43	37	6~33					
M8	ITW-840S	40	31	21	10~17	8.5	30	12	33	12.0
M8	ITW-850S	50	41	30	11~27					
M8	ITW-860S	60	51	40	11~37					
M8	ITW-870S	70	61	50	11~47					
M8	ITW-880S	80	71	60	11~57	10.4	40	14	43	15.0
M8	ITW-8200S	200	191	150	41~177					
M8	ITW-8300S	300	291	200	91~277					
M10	ITW-1050S	50	38	26	12~18					
M10	ITW-1070S	70	58	46	12~38	10.4	40	14	43	15.0
M10	ITW-1090S	90	78	66	12~58					
M10	ITW-1010S	100	88	76	12~68					
M10	ITW-10200S	200	188	150	38~168					
M10	ITW-10300S	300	288	200	88~268	10.4	40	14	43	15.0
W3/8	ITW-3050S	50	38	26	12~18					
W3/8	ITW-3070S	70	58	46	12~38					
W3/8	ITW-3010S	100	88	76	12~68					