


図面／規格
【オールアンカー（C）】

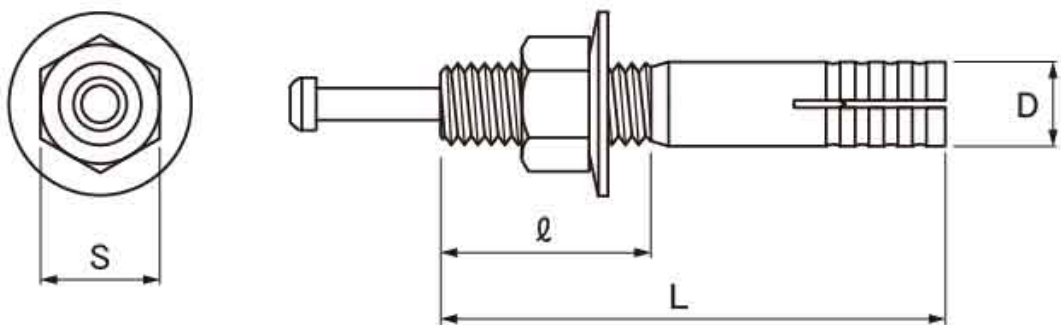

単位:mm

ねじの呼び	品番	全長L	ねじ長さℓ	最大取付物厚	穿孔径	アンカー埋込長さ	穿孔深さ	座金付ナット二面幅S			
M6	C- 645	45	15	5	6.4	30	36以上	10			
	C- 660	60	20	20							
	C- 680	80	20	40							
M8	C- 840	40	15	5	8.5	25	33以上	12			
	C- 850	50	20	5							
	C- 860	60	20	15							
	C- 870	70	25	25							
	C- 890	90	25	45							
	C- 810	100	35	55							
	C- 810D										
M10	C- 1050	50	20	6	10.5	30	40以上	14			
	C- 1060	60	25	6							
	C- 1070	70	25	16							
	C- 1080	80	25	26							
	C- 1090	90	30	36							
	C- 1010	100	30	46							
	C- 1012	120	30	66							
	C- 1015	150	30	96							
	C- 1015D										
	M12	C- 1260	60	20			6	12.7	40	52以上	19
C- 1270		70	25	6							
C- 1280		80	25	16							
C- 1290		90	30	26							
C- 1210		100	40	36							
C- 1212		120	50	56							
C- 1215		150	50	86							
C- 1215D											
M16		C- 1680	80	30	10	17.0	50			66以上	24
		C- 1610	100	40	20						
	C- 1612	120	40	40							
	C- 1615	150	50	70							
	C- 1619	190	50	110							
M20	C- 2010	100	40	15	21.5	60	80以上	30			
	C- 2013	130	50	25							
	C- 2015	150	50	45							
	C- 2019	190	50	85							
	C- 2023	230	50	125							
	C- 2550	50	20	5							
W5/16	C- 2570	70	25	25	8.5	35	43以上	12			
	C- 3060	60	25	6							
W3/8	C- 3060D				80	25	26	10.0	40	50以上	14
	C- 3080	80	25	26						17	
	C- 3090	90	30	36						14	
W1/2	C- 4070	70	25	6	13.5	50	62以上	21			
	C- 4090	90	30	26							