


図面／規格
【ボルトアンカー（BA）】

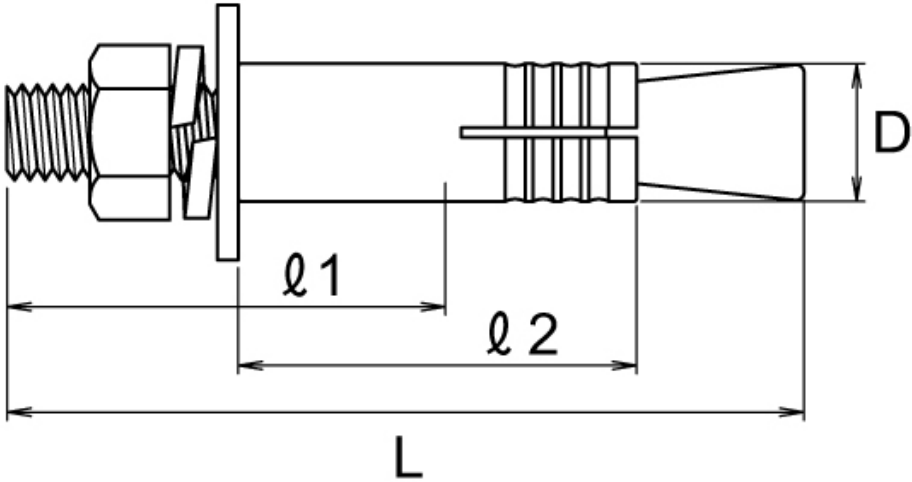

BA タイプ スチール製 ミリねじ:三価クロメート処理 インチねじ:有色クロメート処理
BA-D タイプ スチール製 溶融亜鉛めっき(ドブめっき)
SBA タイプ ステンレス製 SUSXM7・SUS304 系

単位:mm

ねじの呼び	品番			アンカー外径 D			全長 L	ねじ長さ ℓ1			スリーブ長さ ℓ2			最大取付物厚	穿孔径			アンカー埋込み長さ			穿孔深さ											
	鉄	ドブ	SUS	鉄	ドブ	SUS		鉄	ドブ	SUS	鉄	ドブ	SUS		鉄	ドブ	SUS	鉄	ドブ	SUS	鉄	ドブ	SUS									
M6	BA-650	-	SBA-650	9.5			50	25			30			8	10			30			33											
M8	BA-865	BA-865D	SBA-865	12			65	35			35			15	12.5			35			39											
	BA-870	BA-870D	SBA-870				70	40						20																		
	-	-	SBA-810				100	70						50																		
M10	BA-1070	BA-1070D	SBA-1070	14			70	35	40	40			11	14.5			40			45												
	BA-1080	BA-1080D	SBA-1080				80	45	50				21																			
	BA-1010	BA-1010D	SBA-1010				100	65	70				41																			
	BA-1012	BA-1012D	SBA-1012				120	85	90				61																			
	BA-1015	-	SBA-1015				150	115	-				120										91									
M12	BA-1280	-	-	17.3			80	35	-	50			6	18			50			56												
	BA-1210	BA-1210D	SBA-1210				100	55					26																			
	BA-1212	BA-1212D	SBA-1212				120	75					46																			
	-	BA-12125D	SBA-12125				125	-	75				60										36	-	60	-	67					
	BA-1215	BA-1215D	SBA-1215				150	105					76										50			50			56			
	BA-1216	BA-1216D ※	SBA-1216				160	115					86																			
BA-1220	BA-1220D ※	SBA-1220	200	155			126																									
BA-1610	BA-1610D	SBA-1610	100	50			20	60			22.5			60			68															
BA-1612	BA-1612D	SBA-1612	120	70			30																									
-	BA-16125D	SBA-16125	125	-	75	35																										
M16	BA-1615	BA-1615D	SBA-1615	21.7			150	100			60			60	22.5			60			68											
	BA-1616	BA-1616D ※	SBA-1616				160	110						70																		
	BA-1620	BA-1620D ※	SBA-1620				200	150						110																		
	BA-2016	BA-2016D ※	SBA-2016				25.4	160	100					80										40	26	80			90			
M20	-	BA-2017D ※	SBA-2017 ※	27.2			170	100			75			50	28			-	75			-	88									
	BA-2020	BA-2020D ※	SBA-2020	25.4	27.2	200	140	130	80	75	80	26	28	80	-	75	90	-	103													
M22	-	BA-2220D	SBA-2220	-	31.8	32	200	-	110	120	-	90	62	-	33	-	90	-	103													
M24	-	BA-2420D	SBA-2420	-	34	200	-	100	110	-	100	47	-	35	-	100	-	115														
W3/8	BA-3070	-	-	14	-	70	35	-	40			-	11	14.5	-	40	-	45	-													
	BA-3080	-	-		-	80	45	-				-	21		-	-	-															
W1/2	BA-4100	-	-	17.3	-	100	50	-	50	-	50	26	18	-	50	-	56	-														

・ナット/ワッシャー/スプリングワッシャー仕様 -コンクリート面からのボルト突出寸法目安:全長-穿孔深さ
・最大取付物厚=全長-埋込長さ-(ナット/スプリングワッシャー/ワッシャー)取付け後にナット上部にネジの余長(3山)が必要な場合は、最大取付物厚から差し引いてください。
※受注生産品となります。