


図面／規格
【溝付ナット（低形（２種））】

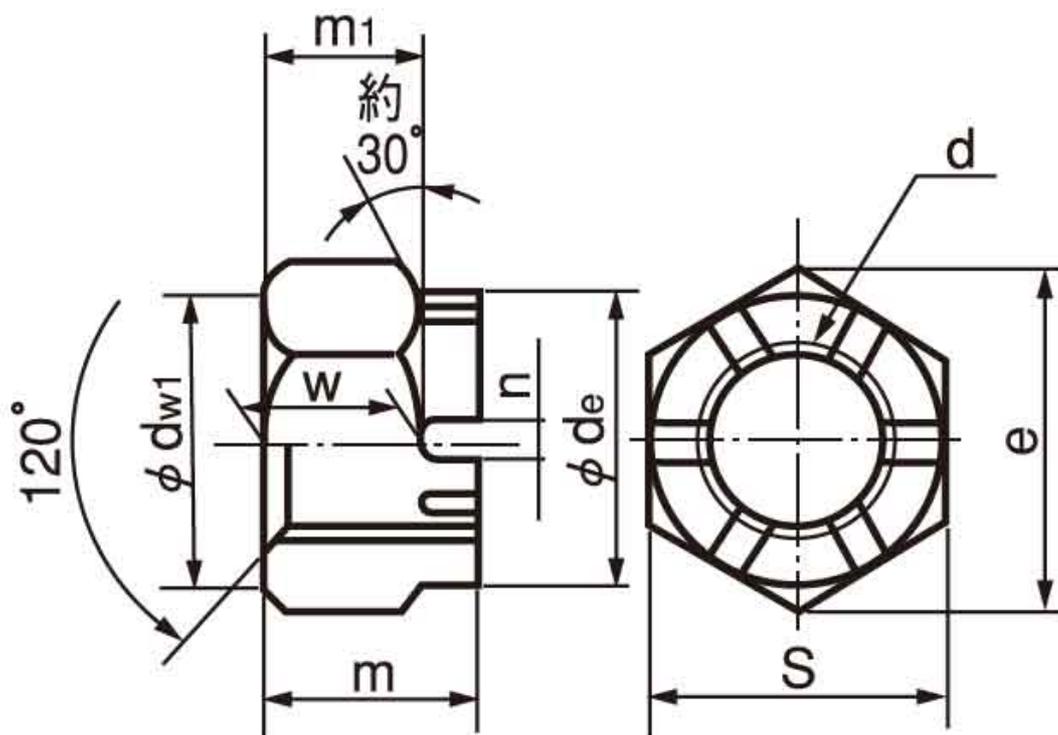

ねじの 呼び(d)	低 形				m1 約	S 基準 寸法	許容差		dw1 約	de 約	n 基準 寸法	許容差		溝 の 数	(参考) 割ピン の寸法
	m		w				中	中				中	中		
	基準 寸法	許容差 中	基準 寸法	許容差 中											
M10	8	0	4.5	0	-	17	0	-0.7	16.5	-	2.8	+0.3	0	6	2.5×25
M12	10	-0.58	6	-0.48	-	19			18	17	3.5				3.2×25
(M14)	11		7		7	22			21	19					3.2×28
M16						24	0	-0.8	23	22	4.5	+0.4	0		4×32
(M18)						27			26	25					4×36
M20	13	0	8	0	8	30			29	28					4×40
(M22)		-0.70		-0.58		32			31	30					5×40
M24	14		9		9	36	0		34	34	5.5				5×45
(M27)	16		10		10	41	-1		39	38					5×50
M30	18		11		11	46			44	42					6.3×56
(M33)	20		13		13	50			48	46	7				6.3×63
M36	21		14	0	14	55			53	50					6.3×71
(M39)	23	0	15	-0.7	15	60			57	55					6.3×71
M42	25	-0.84	16		16	65	0		62	58					8×71
(M45)	27		18		18	70	-1.2		67	62					8×80
M48	29		20		20	75			72	65	9				8×80
(M52)	31		21		21	80			77	70		+0.5	0		8×90
M56	34		23	0	23	85			82	75				8	8×90
(M60)	36		23	-0.84	23	90			87	80					10×100
M64	38	0	25		25	95			92	85					10×100
(M68)	40	-1.0	27		27	100	0	-1.4	97	90	11				10×112
M72	42		28		28	105			102	95					10×125
(M76)	46		32	0	32	110			107	100				10	10×125
M80	48		34	-1.0	34	115			112	105					10×140