


図面／規格
【同心止め輪（軸用・羽島製）】

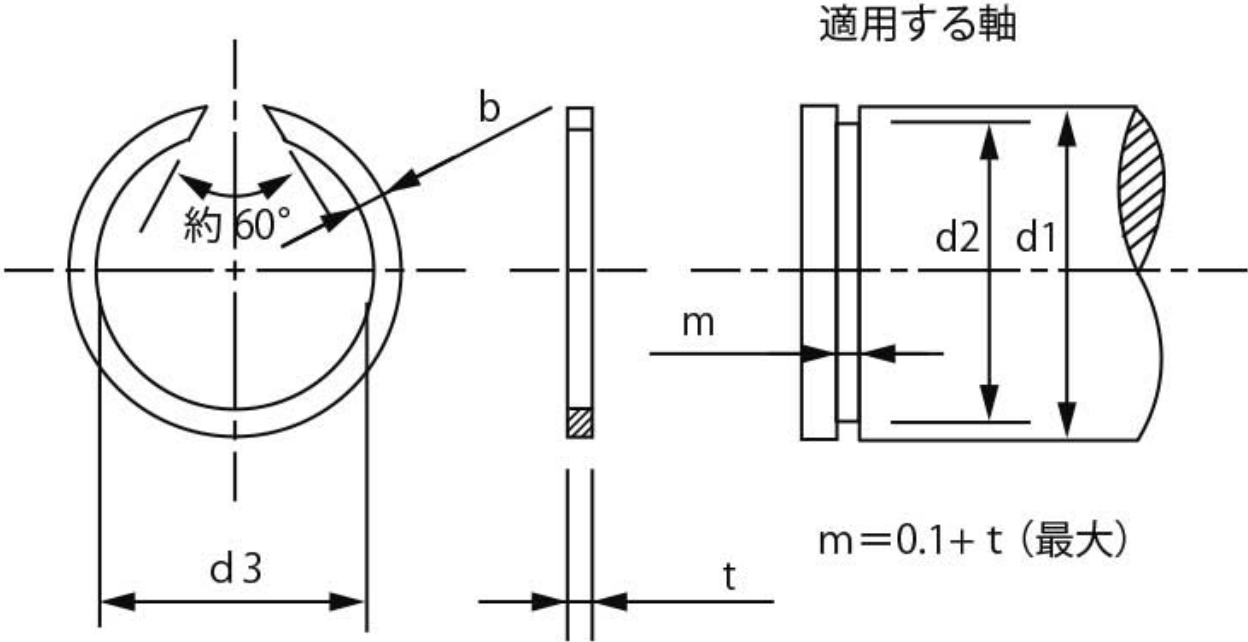

単位: mm

呼び径	止め輪寸法							呼び径	止め輪寸法							呼び径	止め輪寸法									
	d1	d3	b	t	d2		d1		d3	b	t	d2		d1	d3		b	t	d2							
	寸法	最大	寸法	公差	寸法	公差	寸法		最大	寸法	公差	寸法	公差	寸法	最大		寸法	公差	寸法	公差	寸法					
WR-	4	4	3.7	0.8	0.5	1.0	1.3	1.5	1.75	± 0.08	1.2	± 0.06	47	47	44.8	2.3	1.5	2.8	± 0.08	± 0.06	160	160	156.6	4.0	2.5	157.4
5	5	4.7	1.0	48									48	45.8	165						165	161.6	162.4			
6	6	5.6	1.1	50									50	47.8	170						170	166.6	167.4			
7	7	6.5	1.2	0.7	1.0	1.3	1.5	1.75	± 0.08	1.2	± 0.06	52	52	49.8	2.3	1.5	2.8	± 0.08	± 0.06	175	175	171.6	4.0	2.5	172.4	
8	8	7.4	55									55	52.6	180						180	175.6	177.0				
9	9	8.4	58									58	55.6	185						185	180.6	182.0				
10	10	9.4	1.3	0.7	1.0	1.3	1.5	1.75	± 0.08	1.2	± 0.06	60	60	57.6	2.3	1.5	2.8	± 0.08	± 0.06	190	190	185.6	4.0	2.5	187.0	
11	11	10.2										61	61	58.6						195	195	190.6			192.0	
12	12	11.2										62	62	59.6						200	200	195.6			197.0	
13	13	12.2	1.5	0.7	1.0	1.3	1.5	1.75	± 0.08	1.2	± 0.06	63	63	60.6	2.3	1.5	2.8	± 0.08	± 0.06	210	210	205.6	4.0	2.5	207.0	
14	14	13.1										64	64	61.6						220	220	215.6			217.0	
15	15	14.0										65	65	62.6						225	225	220.6			222.0	
16	16	15.0	1.3	0.7	1.0	1.3	1.5	1.75	± 0.08	1.2	± 0.06	68	68	65.4	2.3	1.5	2.8	± 0.08	± 0.06	230	230	225.6	4.0	2.5	227.0	
17	17	16.0										70	70	67.4						240	240	235.6			237.0	
18	18	17.0										72	72	69.4						250	250	245.6			247.0	
19	19	17.9	1.5	0.7	1.0	1.3	1.5	1.75	± 0.08	1.2	± 0.06	73	73	70.4	2.3	1.5	2.8	± 0.08	± 0.06	260	260	253.0	4.0	2.5	255.0	
20	20	18.7										75	75	72.4						265	265	258.0			260.0	
21	21	19.7										80	80	77.4						270	270	263.0			265.0	
22	22	20.7	1.3	0.7	1.0	1.3	1.5	1.75	± 0.08	1.2	± 0.06	85	85	82.0	2.3	1.5	2.8	± 0.08	± 0.06	280	280	273.0	4.0	2.5	275.0	
23	23	21.7										90	90	87.0						285	285	278.0			280.0	
24	24	22.5										95	95	92.0						290	290	283.0			285.0	
25	25	23.5	1.5	0.7	1.0	1.3	1.5	1.75	± 0.08	1.2	± 0.06	100	100	97.0	2.3	1.5	2.8	± 0.08	± 0.06	300	300	293.0	4.0	2.5	295.0	
26	26	24.5										105	105	101.7						305	305	298.0			300.0	
28	28	26.5										110	110	106.7						310	310	303.0			305.0	
29	29	27.5	1.3	0.7	1.0	1.3	1.5	1.75	± 0.08	1.2	± 0.06	115	115	111.7	2.3	1.5	2.8	± 0.08	± 0.06	320	320	313.0	4.0	2.5	315.0	
30	30	28.5										120	120	116.7						330	330	323.0			325.0	
32	32	30.2										125	125	121.7						340	340	333.0			335.0	
35	35	33.2	1.5	0.7	1.0	1.3	1.5	1.75	± 0.08	1.2	± 0.06	130	130	126.7	2.3	1.5	2.8	± 0.08	± 0.06	350	350	343.0	4.0	2.5	345.0	
37	37	35.2										135	135	131.6						360	360	353.0			355.0	
38	38	36.2										140	140	136.6						370	370	363.0			365.0	
40	40	37.8	1.3	0.7	1.0	1.3	1.5	1.75	± 0.08	1.2	± 0.06	145	145	141.6	2.3	1.5	2.8	± 0.08	± 0.06	380	380	373.0	4.0	2.5	375.0	
42	42	39.8										150	150	146.6						390	390	383.0			385.0	
43	43	40.8										155	155	151.6						400	400	393.0			395.0	
45	45	42.8																								