


図面／規格
【片舌付ワッシャー】

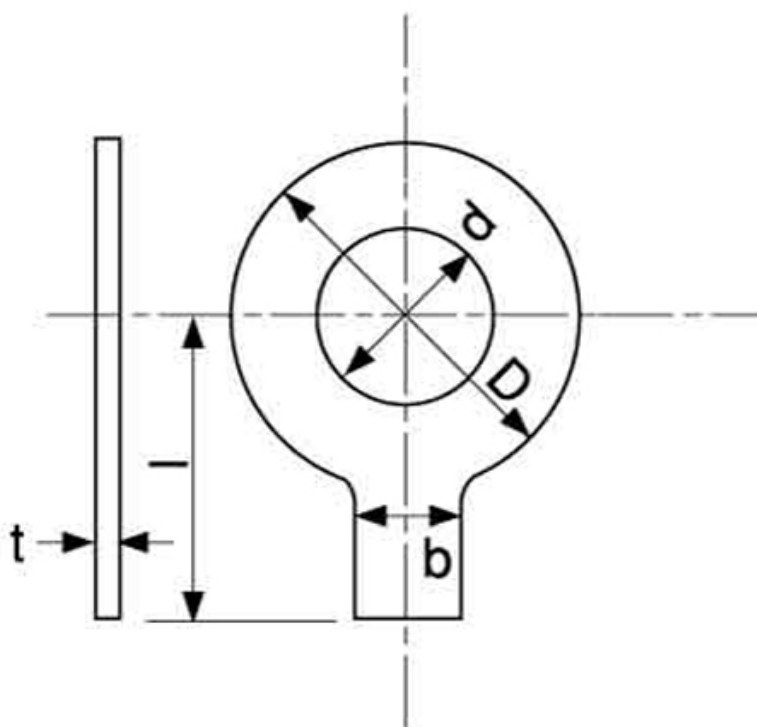

ねじの呼び	内径 (d)	外径 (D)	穴芯長 (l)	爪幅 (b)	厚み (t) 鉄製品	厚み (t) SUS製品
W1/2	13.5	30	27	10	0.8	0.8
M3	3.2	12	13	4	0.3	0.3
M4	4.3	14	14	5	0.3	0.3
M5	5.3	17	15	6	0.5	0.5
M6	6.5	18	15	6	0.5	0.5
M8	8.5	22	20	7	0.5	0.5
M10	10.5	26	22	9	0.8	0.8
M12	12.5	30	27	10	0.8	0.8
M14	15	32	30	10	0.8	0.8
M16	17	38	32	12	1.2	1.2
M18	19	42	34	14	1.2	1.2
M20	21	45	36	15	1.2	1.2
M22	23	48	40	16	1.2	1.2
M24	25	52	44	17	1.2	1.2
M27	28	58	48	20	1.6	1.5
M30	31	62	52	21	1.6	1.5
M33	34	68	55	23	1.6	1.5
M36	37	75	60	26	1.6	1.5
M39	40	80	65	26	1.8	1.5
M42	44	85	70	28	1.8	1.5
M45	47	90	75	30	1.8	1.5
M48	50	95	80	32	1.8	1.5
M52	54	100	85	34	1.8	1.5
M56	58	110	90	36	2.0	2.0