


図面／規格
【両舌付ワッシャー】

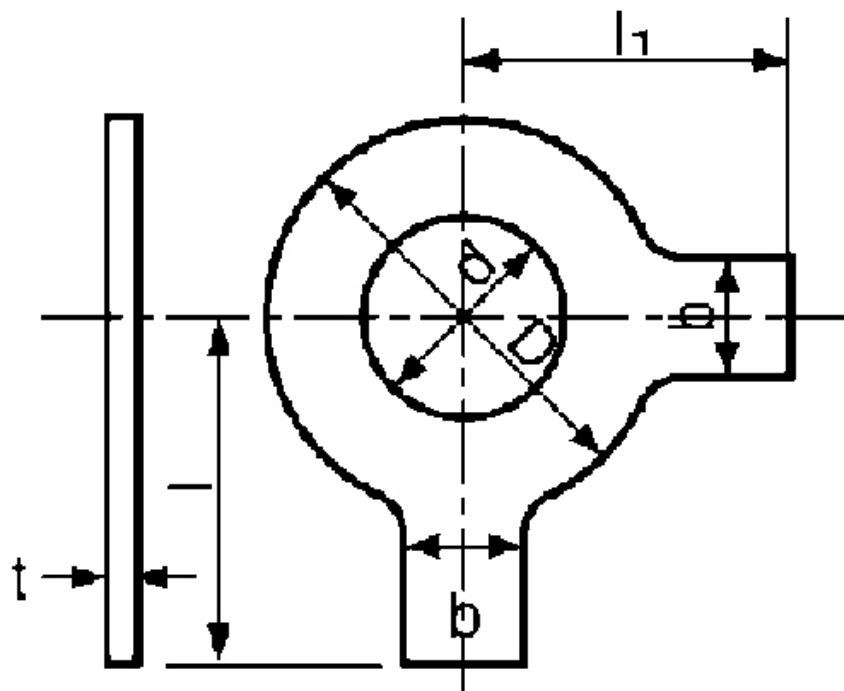

ねじの 呼び	内径 (d)	外径 (D)	穴芯長 (l)	穴芯長 (l1)	爪幅 (b)	厚み(t) 鉄製品	厚み(t) SUS製品
W1/2	13.5	24	27	19	10	0.8	0.8
M3	3.2	7	13	5	4	0.3	0.3
M4	4.3	9	14	7	5	0.3	0.3
M5	5.3	10	15	8	6	0.5	0.5
M6	6.5	13	15	9	6	0.5	0.5
M8	8.5	16	20	13	7	0.5	0.5
M10	10.5	20	22	14	9	0.8	0.8
M12	12.5	24	27	19	10	0.8	0.8
M14	15	26	30	21	10	0.8	0.8
M16	17	30	32	24	12	1.2	1.2
M18	19	34	34	26	14	1.2	1.2
M20	21	38	36	28	15	1.2	1.2
M22	23	40	40	32	16	1.2	1.2
M24	25	44	44	35	17	1.2	1.2
M27	28	48	48	38	20	1.6	1.5
M30	31	52	52	42	21	1.6	1.5
M33	34	58	55	46	23	1.6	1.5
M36	37	62	60	50	25	1.6	1.5
M39	40	68	65	55	26	1.8	1.5
M42	44	72	70	62	28	1.8	1.5
M45	47	78	75	65	30	1.8	1.5
M48	50	82	80	70	32	1.8	1.5
M52	54	88	85	75	34	1.8	1.5
M56	58	94	90	80	36	2.0	2.0