


図面／規格
【 1 0 . 9 六角ボルト】

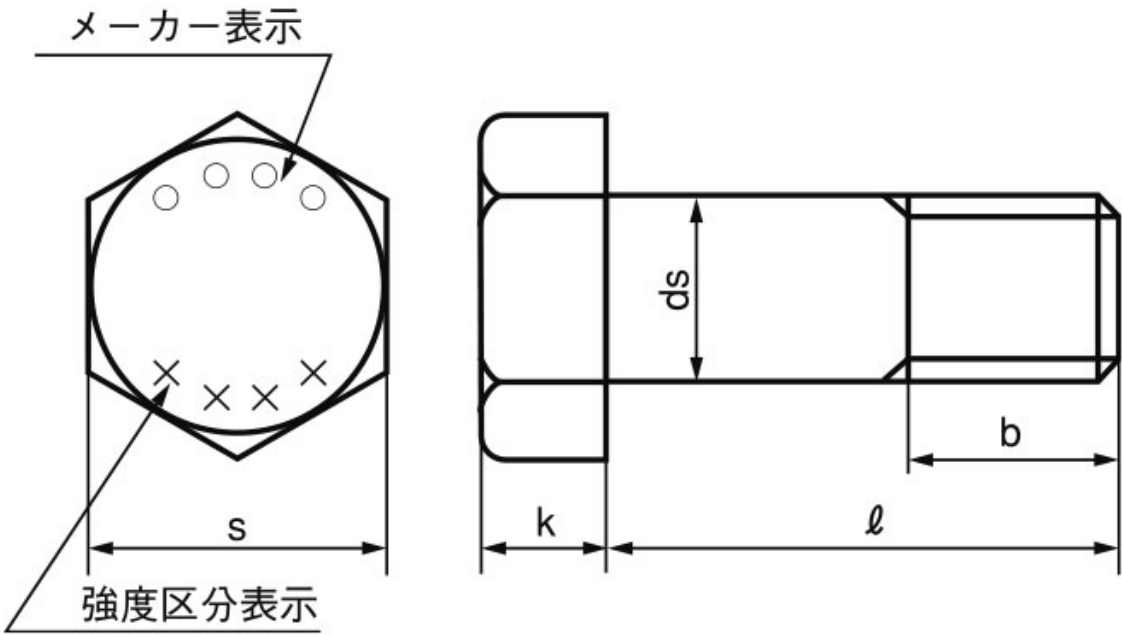

呼び径 (d)	ds		K		S	
	基準寸法	許容差	基準寸法	許容差	基準寸法	許容差
M5	5	0 -0.1	3.5	± 0.15	8	0 -0.2
M6	6	0	4	± 0.25	10	0 -0.6
M8	8	-0.2	5.5	± 0.3	13	0
M10	10	-0.25	7		17	-0.7
M12	12		8		19	0 -0.8
M14	14		9	± 0.35	22	
M16	16	-0.35	10		24	
M18	18		12	± 0.4	27	0 -1.0
M20	20	0	13		30	
M22	22		14		32	0 -1.2
M24	24		15	± 0.5	36	
M27	27	-0.4	17		41	
M30	30		19		46	0 -1.4
M33	33	-0.45	21		50	
M36	36		23	± 0.5	55	
M39	39	0	25		60	0 -1.2
M42	42		26		65	
M45	45		28	± 0.5	70	
M48	48	-0.45	30		75	0 -1.4
M52	52		33		80	
M56	56	-0.45	35	± 0.5	85	0
M64	64		40		95	

(b は d X2+6、長さ 130 より d X2+12、長さ 220 より d X2+25)