


図面／規格
【六角ボルト（全ねじ（細目））】

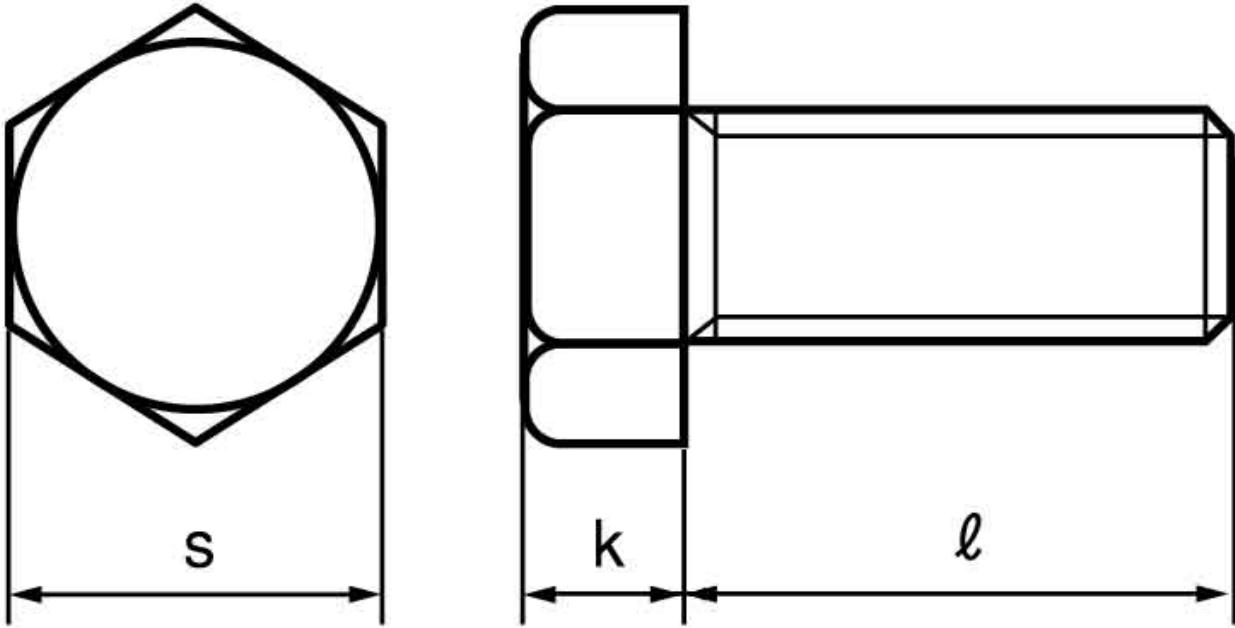

ねじの 呼び (d)	ピッチ (P)	K		S	
		基準 寸法	許容差	基準 寸法	許容差
M6	0.75	4	±0.25	10	0 -0.6
M8	1.0	5.5		13	0
M10	1.25	7	±0.3	17	-0.7
M12	1.25	8		19	0 -0.8
M14	1.5	9		22	
M16	1.5	10		24	
M18	1.5	12	±0.35	27	
M20	1.5	13		30	0 -1
M22	1.5	14		32	
M24	2.0	15		36	
M27	2.0	17	±0.40	40	
M30	2.0	19		46	0 -1.2
M33	2.0	21		50	
M36	3.0	23		55	0 -1.2