


図面／規格
【C A P (U N C (アンブラコ】

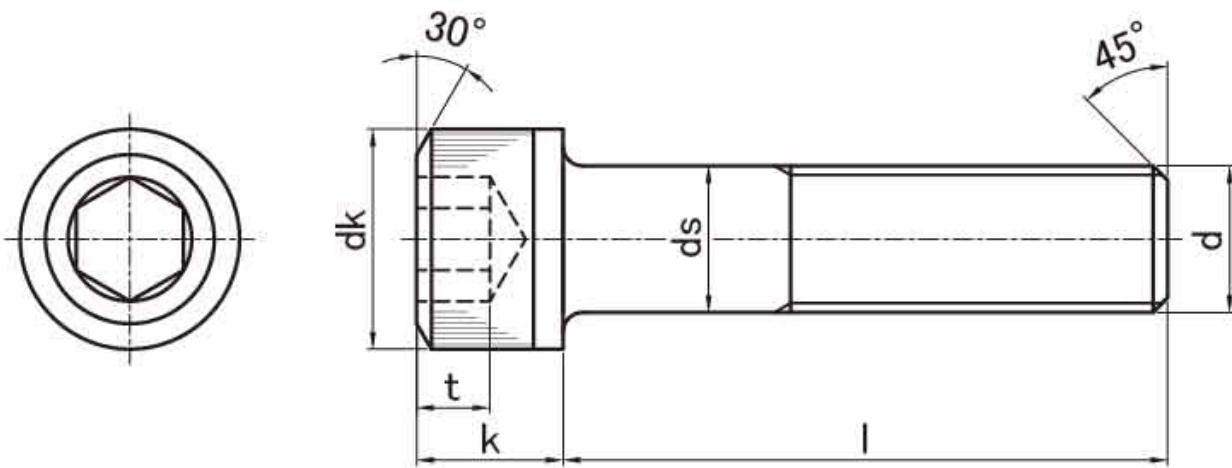

サイズ 呼び径-山数／1インチあたり		UNC #1-64	UNC #2-56	UNC #3-48	UNC #4-40	UNC #5-40	UNC #6-32	UNC #8-32	UNC #10-24	UNC #12-24	[単位:mm]
d	約	1.8	2.1	2.5	2.8	3.1	3.5	4.1	4.8	5.4	
ds	最大	1.854	2.184	2.514	2.844	3.175	3.505	4.165	4.826	5.486	
	最小	1.765	2.087	2.41	2.73	3.053	3.375	4.025	4.673	5.334	
dk	最大	2.997	3.556	4.089	4.648	5.207	5.74	6.858	7.924	8.229	
	最小	2.844	3.403	3.911	4.47	5.029	5.537	6.654	7.696	7.975	
k	最大	1.854	2.184	2.514	2.844	3.175	3.505	4.165	4.826	5.486	
	最小	1.778	2.108	2.413	2.743	3.073	3.403	4.038	4.699	5.334	
t	最小	0.787	0.965	1.117	1.295	1.447	1.625	1.955	2.286	2.616	
六角穴サイズ	六角レンチ	1/16	5/64	5/64	3/32	3/32	7/64	9/64	5/32	5/32	

サイズ 呼び径-山数／1インチあたり		UNC 1/4-20	UNC 5/16-18	UNC 3/8-16	UNC 7/16-14	UNC 1/2-13	UNC 9/16-12	UNC 5/8-11	UNC 3/4-10	UNC 7/8-9	UNC 1"-8
d	約	6.3	7.9	9.5	11	12.7	14.2	15.8	19	22.2	25.4
ds	最大	6.35	7.937	9.525	11.112	12.7	14.287	15.875	19.05	22.225	25.40
	最小	6.184	7.754	9.342	10.906	12.494	14.066	15.654	18.811	21.963	25.110
dk	最大	9.525	11.912	14.274	16.662	19.05	21.412	23.825	28.575	33.324	38.10
	最小	9.271	11.607	13.97	16.306	18.669	21.005	23.393	28.117	32.842	37.566
k	最大	6.35	7.924	9.525	11.125	12.7	14.274	15.875	19.05	22.225	25.40
	最小	6.197	7.772	9.347	10.922	12.496	14.071	15.646	18.796	21.963	25.095
t	最小	3.048	3.835	4.622	5.41	6.223	6.604	7.797	9.398	10.972	12.573
六角穴サイズ	六角レンチ	3/16	1/4	5/16	3/8	3/8	7/16	1/2	5/8	3/4	3/4