




形状 1

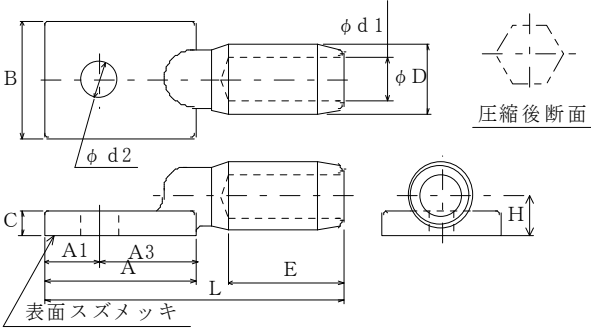


形状 2

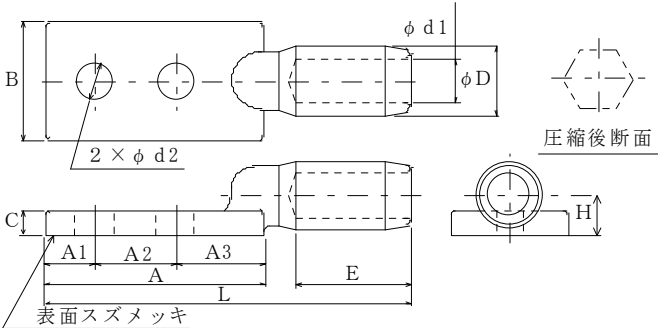

形状 3

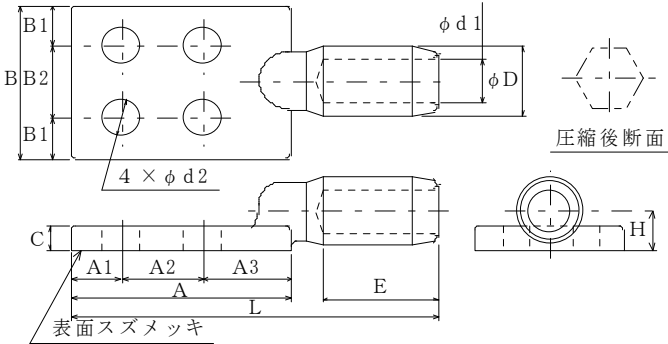

形状 4

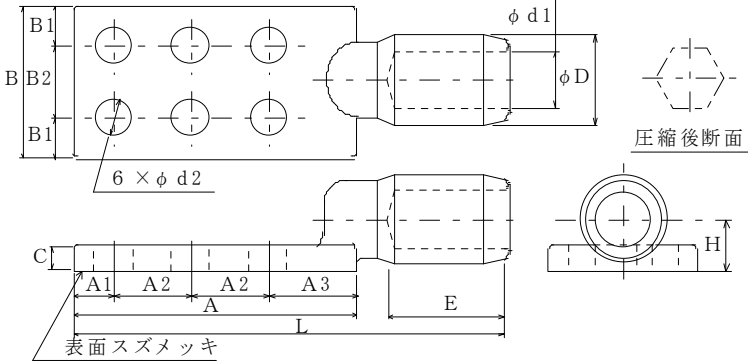

型番	適用電線		各部の寸法（mm）														使用ボルト		圧縮使用 ダイズ 対角寸法 （mm）	形状
	公称 断面積 （mm ² ）	円圧	D	d 1	E	A	A1	A2	A3	B	B 1	B 2	C	d 2	L	H	サイズ	本数		
		撚り線外径 （mm）																		
C1-14G	14	4.4	14	4.8	26	55	25	—	30	40	—	—	5	14	90	8	M12	1	14	1
C1-22G	22	5.5	14	5.9	26	55	25	—	30	40	—	—	5	14	90	8	M12	1	14	1
C1-38G	38	7.3	14	7.8	26	55	25	—	30	40	—	—	5	14	90	8	M12	1	14	1
C1-60G	60	9.3	19	9.8	30	55	25	—	30	40	—	—	5	14	94	10.5	M12	1	19	1
C2-14G	14	4.4	14	4.8	26	90	18	40	32	40	—	—	5	14	125	8	M12	2	14	2
C2-22G	22	5.5	14	5.9	26	90	18	40	32	40	—	—	5	14	125	8	M12	2	14	2
C2-38G	38	7.3	14	7.8	26	90	18	40	32	40	—	—	5	14	125	8	M12	2	14	2
C2-60G	60	9.3	19	9.8	30	90	18	40	32	40	—	—	6	14	135	11	M12	2	19	2
C2-100G	100	12.0	23	12.6	39	95	20	40	35	50	—	—	8	14	150	13	M12	2	23	2
C2-125G	125	13.5	26	14.1	39	95	20	40	35	50	—	—	8	14	150	14.5	M12	2	26	2
C2-150G	150	14.7	29	15.4	44	110	25	40	45	50	—	—	10	14	170	16	M12	2	29	2
C2-200G	200	17.0	32	17.9	53	110	25	40	45	50	—	—	10	14	180	17.5	M12	2	32	2
C2-250G	250	19.0	38	19.9	62	110	25	40	45	50	—	—	10	14	207	20.5	M12	2	38	2
C2-325G	325	21.7	42	22.7	62	110	25	40	50	50	—	—	10	14	212	23	M12	2	42	2
C4-325G	325	21.7	42	22.7	62	115	25	40	50	75	17.5	40	10	14	212	23	M12	4	42	4
C4-400G	400	24.1	47	25.2	70	115	25	40	50	75	17.5	40	12	14	222	25.5	M12	4	47	4
C4-500G	500	26.9	47	28.0	70	115	25	40	50	75	17.5	40	12	14	222	25.5	M12	4	47	4
C6-600G	600	29.5	51	30.7	70	155	25	40	50	75	17.5	40	12	14	262	28	M12	6	51	6
C6-800G	800	34.0	56	35.3	90	190	30	50	60	100	25	50	12	18	325	30.5	M16	6	56	6
C6-1000G	1000	38.0	64	39.4	100	190	30	50	60	100	25	50	14	18	335	34.5	M16	6	64	6

材 質 : C 1 1 0 0 B

品名	圧縮端子	品番	C 6 - 1 0 0 0 G
東神電気株式会社			