


RoHS10 Support

○形状 (SHAPE)

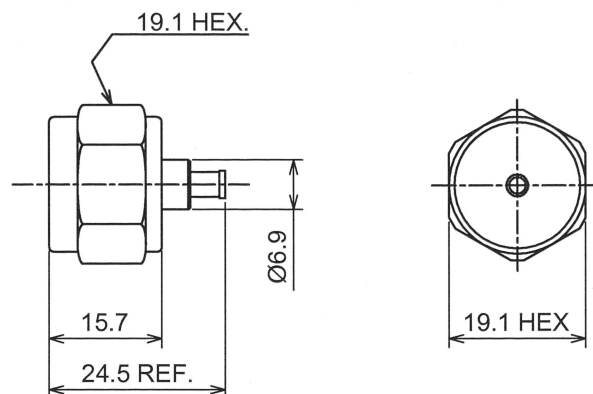


○規格 (Standard) MIL-C-39012

○仕様 (Specification)


特性インピーダンス (Impedance) : 50 Ω
 定格周波数 (Working Frequency Range) : DC~6GHz
 電圧定在波比 (VSWR) : ≤1.30 at 6GHz
 挿入損失 (Insertion Loss) : 0.05dB max × √f GHz (f:Frequency)
 定格電圧 (Voltage Rating) : 500V rms
 耐電圧 (Proof Voltage) : 1000V rms
 接触抵抗 (Contact Resistance) : 1mΩ max
 絶縁抵抗 (Insulation Resistance) : ≥5000MΩ
 勘合保証回数 (Connector Life) : 500 times min
 使用温度範囲 (Temperature range) : -40°C~150°C
 推奨締め付けトルク (Recommended Torque) : 0.7~1.1Nm

○加工寸法 (ASSEMBLY)


RECOMMENDED CABLE STRIPPING DIMS



SOLDER CONTACT TO CABLE CENTER CONDUCTOR,
 BOTTOMING ON INSULATOR



RECOMMENDED CLIPPING TOOL SIZE



RECOMMENDED CRIMP HEIGHT 3.35±0.1

The tolerance in this area is ± 0.10

7	Ring	BRASS	GOLD
6	GASKET	S.I.R	RED
5	R-ring	BRASS	NONE
4	Shell	BRASS	NICKEL
3	Contact	BRASS	GOLD
2	Dielectric	PTFE	NONE
1	Body	BRASS	NICKEL
No	DESCRIPTION	MATERIAL	FINISH



TOLERANCE DECIMALS .XX ±0.10 .X ±0.15 DIAMETER .X ±0.10				日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD	
Approved	Checked	Drawn			
			Unit mm	N A M E	REV
池尾	大江	山崎	A4		1