

RoHS10 Support

REACH Support

CFSI Support

IP66 Waterproof after mating (Requires waterproof tube)

○形状 (SHAPE)



○規格 (Standard)

JIS-C-5411

MIL-C-39012

○仕様 (Specification)

特性インピーダンス (Impedance): 50 Ω

定格周波数 (Working Frequency Range): DC~11GHz

電圧定在波比 (VSWR): ≤ 1.30 at 6GHz挿入損失 (Insertion Loss): 0.05dB max $\times \sqrt{f}$ GHz (f:Frequency)

定格電圧 (Voltage Rating): 500V rms


耐電圧 (Proof Voltage): 1000V rms

接触抵抗 (Contact Resistance): 1m Ω max絶縁抵抗 (Insulation Resistance): $\geq 5000M\Omega$

勘合保証回数 (Connector Life): 500 times min


使用温度範囲 (Temperature range): -40°C~150°C

推奨締め付けトルク (Recommended Torque): 0.7~1.1Nm

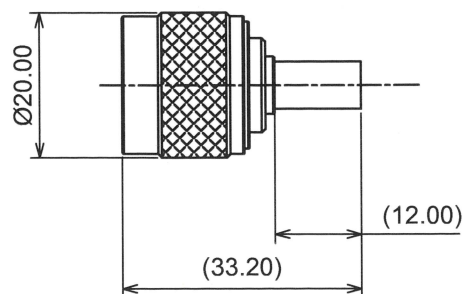


○加工寸法 (ASSEMBLY)

RECOMMENDED CABLE STRIPPING DIMS



SOLDER CONTACT TO CABLE CENTER CONDUCTOR

RECOMMENDED CLIPPING TOOL SIZE

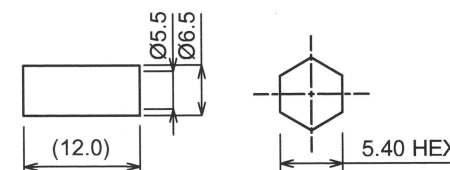RECOMMENDED CRIMP HEIGHT 5.6 $\pm$ 0.20The tolerance in this area is ± 0.10 

7	Ferrule	BRASS	NICKEL
6	GASKET	S. I. R	RED
5	S-ring	Stainless	NONE
4	Shell	BRASS	NICKEL
3	Contact	BRASS	GOLD
2	Dielectric	PTFE	NONE
1	Body	BRASS	NICKEL
No	DESCRIPTION	MATERIAL	FINISH

TOLERANCE DECIMALS .XX $\pm$ 0.10 .X $\pm$ 0.15 DIAMETER .X $\pm$ 0.10				日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD	
Approved	Checked	Drawn			
			Unit mm	N A M E	REV
エレパーツ '23.04.20 池尾	エレパーツ '23.04.20 山崎	エレパーツ '23.04.20 大江	A4		2
				N-PS-2.5D-CR	