


RoHS10 Support

REACH Support

CFSI Support

IP66 Waterproof after mating (Requires waterproof tube)

○形状 (SHAPE)

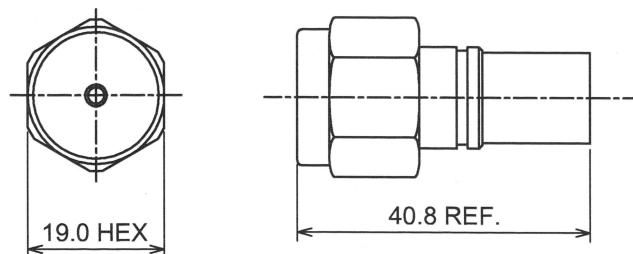

○規格 (Standard)

JIS-C-5411

MIL-C-39012

○仕様 (Specification)

特性インピーダンス (Impedance) : 50 Ω

定格周波数 (Working Frequency Range) : DC~11GHz

電圧定在波比 (VSWR) : ≤ 1.30 at 6GHz挿入損失 (Insertion Loss) : $0.05\text{dB max} \times \sqrt{f \text{ GHz}}$ (f:Frequency)

定格電圧 (Voltage Rating) : 500V rms

耐電圧 (Proof Voltage) : 1000V rms

接触抵抗 (Contact Resistance) : $1\text{m}\Omega \text{ max}$ 絶縁抵抗 (Insulation Resistance) : $\geq 5000\text{M}\Omega$


勘合保証回数 (Connector Life) : 500 times min

使用温度範囲 (Temperature range) : $-40^{\circ}\text{C} \sim 150^{\circ}\text{C}$

推奨締め付けトルク (Recommended Torque) : 4.0 Nm


○加工寸法 (ASSEMBLY)

RECOMMENDED CABLE STRIPPING DIMS



- IF THE CORE WIRE IS A STRANDED WIRE, PERFORM PRELIMINARY SOLDERING.
- INSERT INSULATION INTO THE CABLE
- PUSH THE CABLE CENTER CONDUCTOR

RECOMMENDED CLIPPING TOOL SIZE

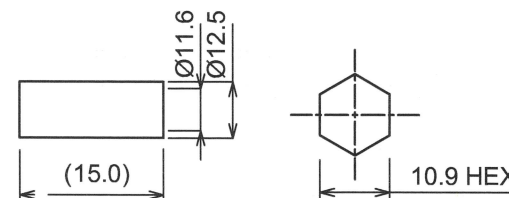

RECOMMENDED CRIMP HEIGHT 11.15±0.30

The tolerance in this area is ± 0.10

7	Ferrule	BRASS	NICKEL
6	GASKET	S . I . R	RED
5	S-ring	Stainless	NONE
4	Shell	BRASS	NICKEL
3	Contact	BRASS	GOLD
2	Dielectric	PTFE	NONE
1	Body	BRASS	NICKEL
No	DESCRIPTION	MATERIAL	FINISH



TOLERANCE DECIMALS .XX ±0.10 .X ±0.15 DIAMETER .X ±0.10				日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD		
Approved	Checked	Drawn				
エレパーツ '22.08.01 池尾	エレパーツ '22.08.01 山崎	エレパーツ '22.08.01 大江	A4	N A M E	N-PS-RG9AU-CR	REV 2