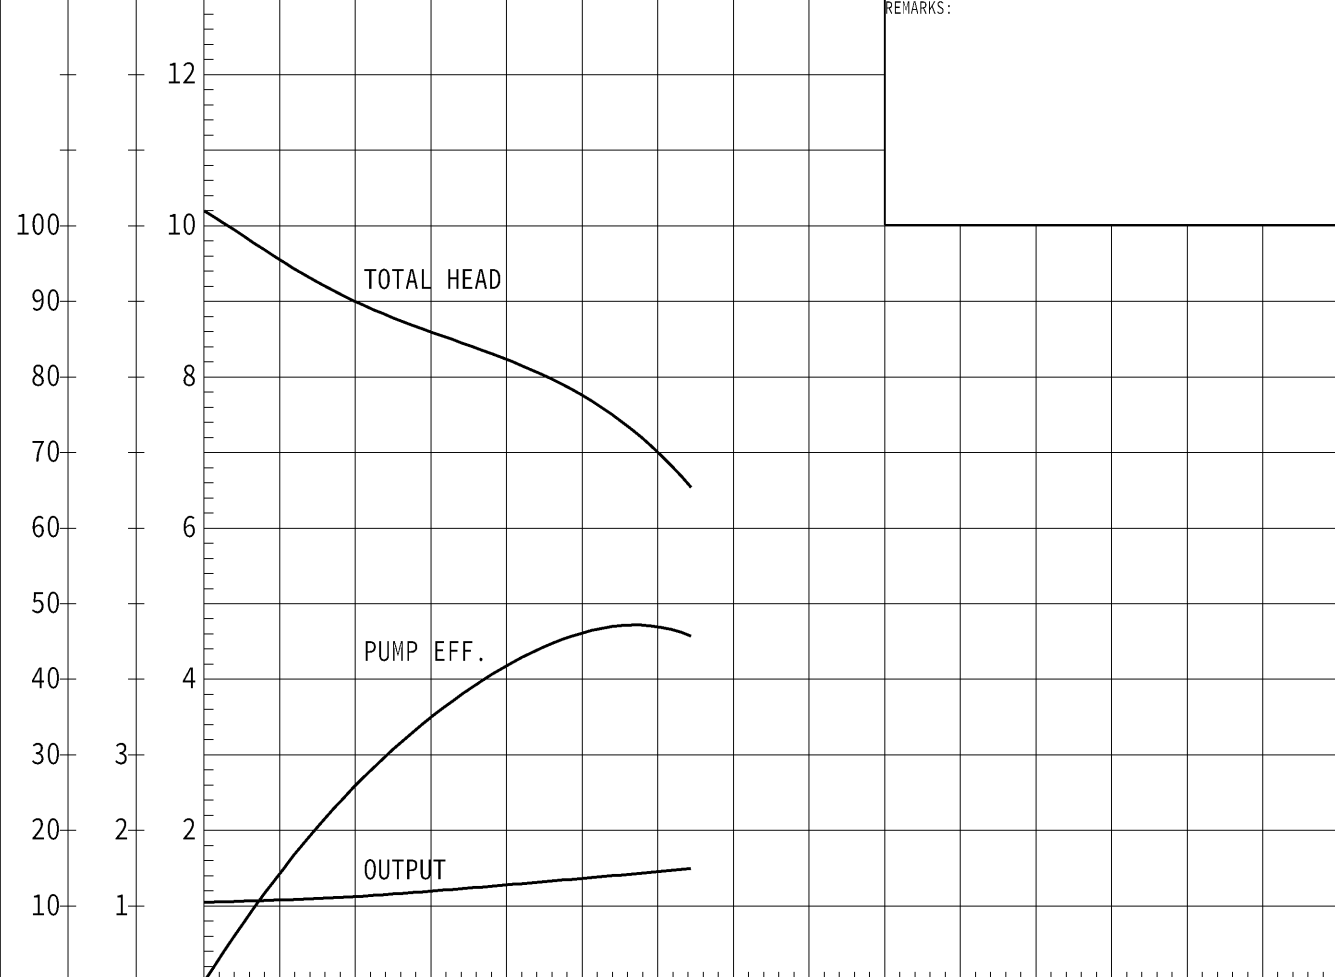


		No. 図番		A-28103-1	
予想性能曲線図 PUMP PERFORMANCE CURVES					
TYPE 名 称		汚物用水中ハイスピンポンプ		MODEL 型 式	
		50UZ41.5 -52		FREQUENCY 周波数	
				50 Hz	
CUSTOMER'S NAME 御注文先					
殿					
EQUIPMENT TITLE 機器名称					
No.					
		標 準 仕 様		STANDARD SPECIFICATIONS	
		御 注 文 仕 様		REQUIRED SPECIFICATIONS	
口 径		DISCHARGE BORE		50 mm	
全揚程		TOTAL HEAD		9 .0 m	
吐出し量		CAPACITY		0 .2 m³/min	
出 力		MOTOR OUTPUT		1 .5 kW	
相×電圧		PHASE×VOLTAGE		3 φ × 200 V	
電 流		CURRENT		8 .0 A	
極数：POLES		／ 回転速度：SPEED OF ROTATION		4 P ／ S.S.1500 min ⁻¹	
始動方式		STARTING METHOD		じか入始動	
耐熱クラス		INSULATION CLASS		F	
REMARKS:					
 The graph plots three performance metrics against Capacity (m³/min) on the x-axis (0 to 1.2). The left y-axis has two scales: one for Head (m) from 6 to 12, and one for Efficiency (%) and Output (kW) from 10 to 100. The 'TOTAL HEAD' curve starts at approximately 10.2 m at 0 m³/min and decreases to about 6.8 m at 0.65 m³/min. The 'PUMP EFF.' curve starts at 0% at 0 m³/min, rises to a peak of about 48% at 0.55 m³/min, and then slightly declines. The 'OUTPUT' curve starts at about 1.1 kW at 0 m³/min and increases gradually to about 1.4 kW at 0.65 m³/min.					
%	kW	m	CAPACITY 吐出し量		
PUMP EFF.	MOTOR OUTPUT	TOTAL HEAD			
ポンプ 効率	出力	全揚程			
株式会社 鶴見製作所			TSURUMI MFG. CO., LTD.		