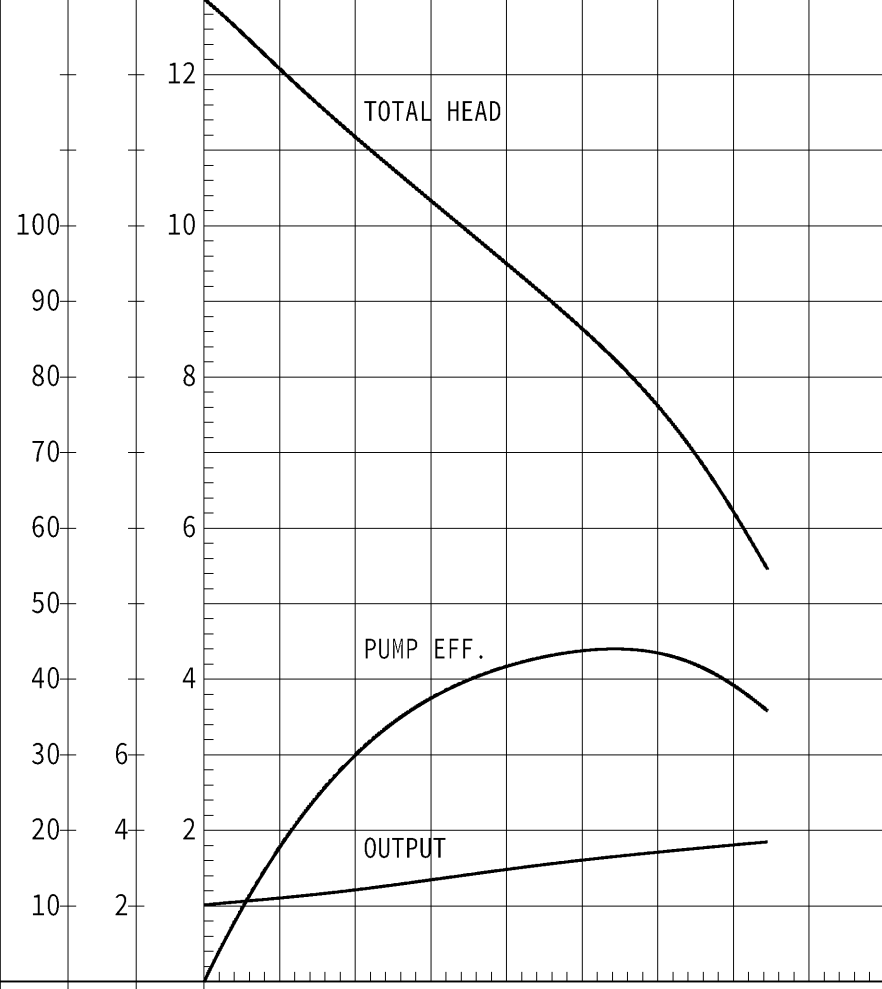


		No. 図番		A-28116-1T	
予想性能曲線図 PUMP PERFORMANCE CURVES					
TYPE 名 称		汚物用水中ハイスピンポンプ		MODEL 型 式 TOS80UZ43.7 -62	
				FREQUENCY 周波数 60 Hz	
CUSTOMER'S NAME 御注文先 殿					
EQUIPMENT TITLE 機器名称 No.					
		標 準 仕 様 STANDARD SPECIFICATIONS		御 注 文 仕 様 REQUIRED SPECIFICATIONS	
口 径 : DISCHARGE BORE		80 mm		mm	
全揚程 : TOTAL HEAD		9.5 m		m	
吐出し量 : CAPACITY		0.8 m³/min		m³/min	
出 力 : MOTOR OUTPUT		3.7 kW		kW	
相×電圧 : PHASE×VOLTAGE		3 φ × 200 V		φ × V	
電 流 : CURRENT		15.2 A		A	
極数: POLES / 回転速度: SPEED OF ROTATION		4 P / S.S.1800 min⁻¹		P / min⁻¹	
始動方式 : STARTING METHOD		じか入始動			
耐熱クラス: INSULATION CLASS		F			
 The graph displays three performance curves for the pump. The x-axis represents Capacity (吐出し量) in m³/min, ranging from 0 to 2.4. The left y-axis represents Total Head (全揚程) in meters (m), ranging from 0 to 12. The right y-axis represents Pump Efficiency (ポンプ効率) in percent (%), ranging from 0 to 100. The Output (出力) curve is a straight line starting at 2 kW for 0 m³/min and increasing to approximately 1.8 kW at 1.5 m³/min. The Pump Efficiency (PUMP EFF.) curve starts at 0% for 0 m³/min, peaks at approximately 45% efficiency at 1.2 m³/min, and then decreases. The Total Head (TOTAL HEAD) curve starts at 12 m for 0 m³/min and decreases as capacity increases, reaching approximately 5.5 m at 1.5 m³/min.				REMARKS:	
%	kW	m	CAPACITY 吐出し量		
PUMP EFF. ポンプ効率	MOTOR OUTPUT 出力	TOTAL HEAD 全揚程	m³/min		
株式会社 鶴見製作所			TSURUMI MFG. CO., LTD.		