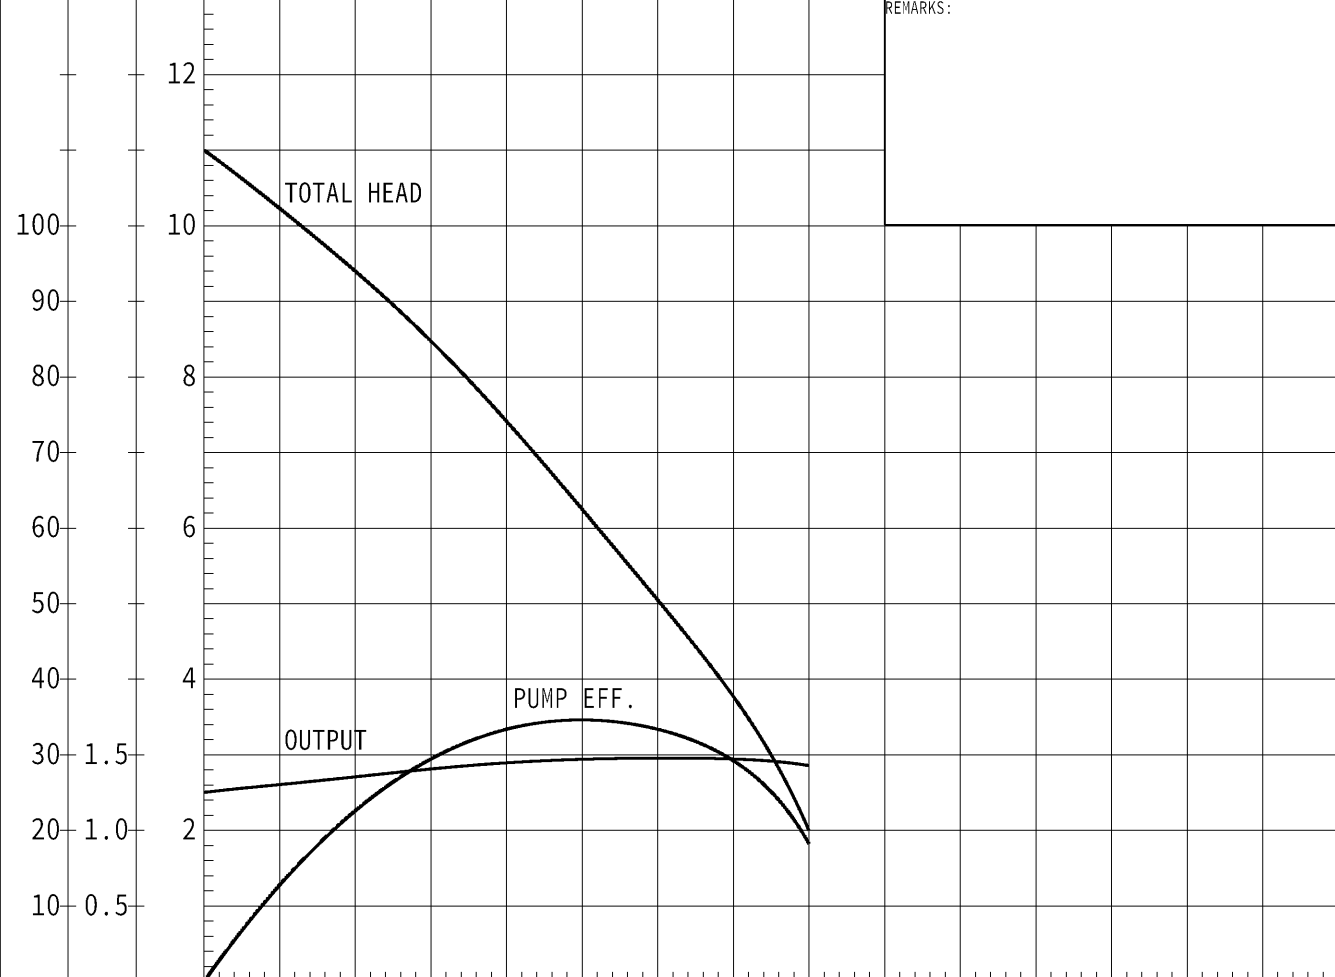


		No. 図番		A-28258-1	
予想性能曲線図 PUMP PERFORMANCE CURVES					
TYPE 名 称		放流用水中フロートポンプ		MODEL 型 式	
		FHP3-15T		FREQUENCY 周波数	
				60 Hz	
CUSTOMER'S NAME 御注文先					
殿					
EQUIPMENT TITLE 機器名称					
No.					
		標 準 仕 様		STANDARD SPECIFICATIONS	
		御 注 文 仕 様		REQUIRED SPECIFICATIONS	
口 径		DISCHARGE BORE		80 mm	
全揚程		TOTAL HEAD		3 m	
吐出し量		CAPACITY		0.75 m³/min	
出 力		MOTOR OUTPUT		1.5 kW	
相×電圧		PHASE×VOLTAGE		3 φ × 200 V	
電 流		CURRENT		6.6 A	
極数: POLES		回 転 速 度: SPEED OF ROTATION		2 P / S.S.3600 min⁻¹	
始動方式		STARTING METHOD		じか入始動	
耐熱クラス		INSULATION CLASS		F	
REMARKS:					
 The graph displays three performance curves for the pump. The x-axis represents Capacity (吐出し量) in m³/min, ranging from 0 to 1.2. The left y-axis has two scales: one for Head (全揚程) in meters (m), ranging from 0 to 12, and another for Motor Output (出力) in kilowatts (kW), ranging from 0 to 1.5. The right y-axis represents Pump Efficiency (ポンプ効率) in percent (%), ranging from 0 to 100. The 'TOTAL HEAD' curve starts at approximately 11.5 m at 0 m³/min and decreases to about 2 m at 0.8 m³/min. The 'PUMP EFF.' curve starts at 0% at 0 m³/min, peaks at approximately 35% efficiency around 0.5 m³/min, and then decreases. The 'OUTPUT' curve starts at approximately 1.2 kW at 0 m³/min, peaks at about 1.5 kW around 0.5 m³/min, and then decreases. The curves intersect at approximately 0.4 m³/min and 1.2 kW.					
%	kW	m	CAPACITY 吐出し量		
PUMP EFF.	MOTOR OUTPUT	TOTAL HEAD			
ポンプ効率	出力	全揚程			
株式会社 鶴見製作所			TSURUMI MFG. CO., LTD.		