




TYPE 名 称	清水用多段渦巻ポンプ	MODEL 型 式	TVMPK2-806E15-P	FUREQUENCY 周波数	50 Hz
-------------	------------	--------------	-----------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

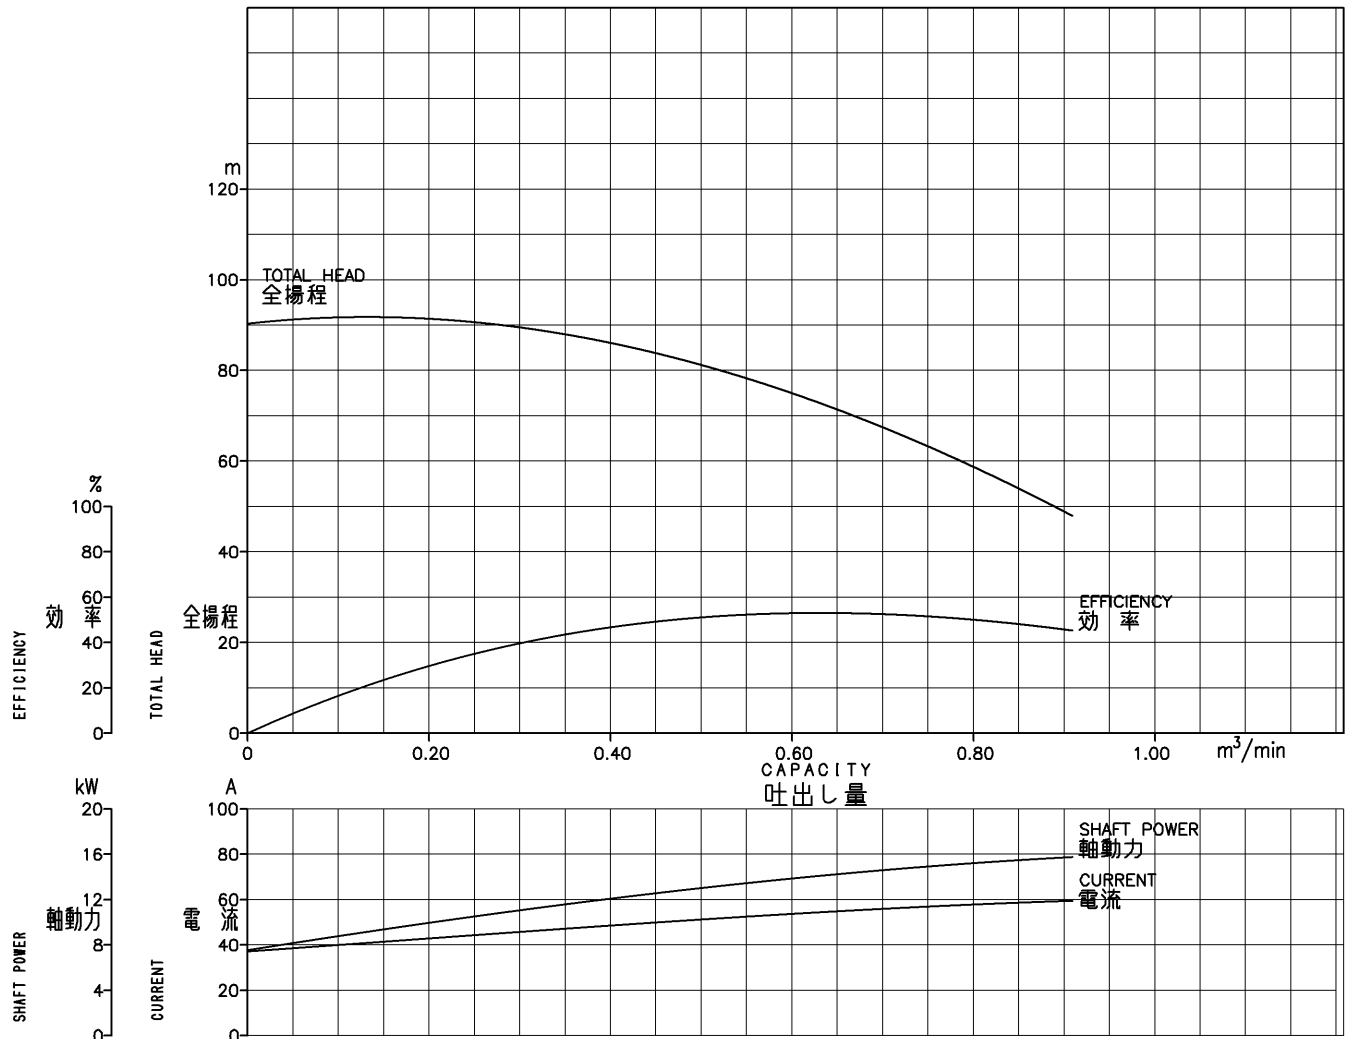

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出量	CAPACITY	m^3/min	0	0.20	0.45	0.56	0.71	0.90	—	—	—
PUMP	全揚程	TOTAL HEAD	m	90.3	91.4	83.8	77.6	66.7	48.9	—	—	—
PUMP	理論動力	WATER POWER	kW	0.0	3.0	6.1	7.1	7.7	7.2	—	—	—
PUMP	ポンプ効率	PUMP EFF.	%	0.0	29.9	48.9	52.3	52.7	45.7	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—
MOTOR	電流	CURRENT	A	37.1	42.8	49.9	52.7	56.1	59.3	—	—	—
MOTOR	入力	INPUT	kW	8.2	10.7	13.5	14.6	15.8	17.0	—	—	—
MOTOR	出力	OUTPUT	kW	7.5	9.9	12.6	13.5	14.7	15.7	—	—	—
PUMP	仕様	吐出量CAPACITY	m^3/min				性能	吐出量CAPACITY	m^3/min			
PUMP	REQU.	全揚程TOTAL HEAD	m				PERF. W.	全揚程TOTAL HEAD	m			
PUMP	ポンプ口径	PUMP SIZE	80mm		羽根径	IMP. DIA.	mm		同期回転速度	SYNC. SPEED OF ROTATION	1500 min^{-1}	
MOTOR	型式	MODEL	SF-PR		出力	OUTPUT	15kW		相・電圧	PHASE-VOLT.	3φ 200V	
MOTOR	極数・周波数	POLE-FREQ.	4P 50Hz		回転速度	SPEED OF ROTATION	1465 min^{-1}		電流	CURRENT	58A	
MOTOR	製造者	MANUFACT.	MITSUBISHI						電動機CD	MOTOR CD		