

RoHS10 Support

REACH Support

CFSI Support

○仕様 (SPECIFICATION)

1. ELECTRICAL CHARACTERISTICS:




- 1.1 IMPEDANCE: 75Ω
- 1.2 FREQUENCY RANGE: DC ~ 12GHz.
- 1.3 VSWR: 1.15Max(@3GHz) 1.30MAX(@6GHz)
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS Min.
- 1.5 INSULATION RESISTANCE: 5000 MEGOHMS Min.
- 1.6 CONTACT RESISTANCE:
 - 1.6.1 CENTER CONTACT: 5.0 MILLIOHMS Max.
 - 1.6.2 OUTER CONTACT: 2.5 MILLIOHMS Max.

2. MECHANICAL DATA:

- 2.1 RECOMMENDED COUPLING NUT TORQUE: 0.8 ~ 1.1N.m

3. ENVIRONMENTAL DATA:

- 3.1 TEMPERATURE RANGE: -65~165°C

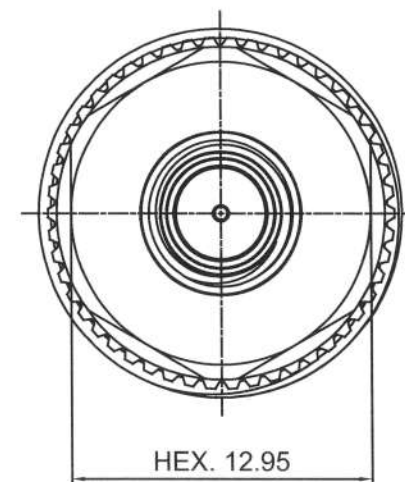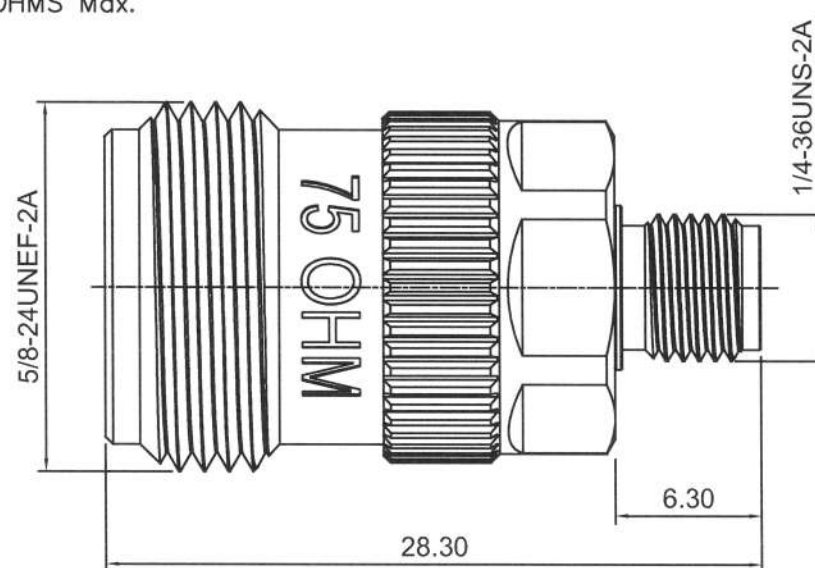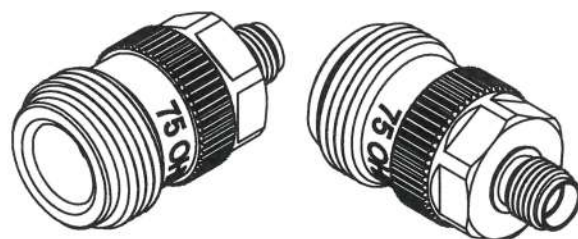

WARNING
DO NOT MATE WITH
50Ω PLUG

3	CONTACT PIN	BeCu	GOLD
2	Dielectric	PTFE	NATURE
1	BODY SMA-N	BRASS	NICKEL
ITEM	NAME	MATERIAL	TREATMENT



TOLERANCE				日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD	
DECIMALS	.XX ±0.10	.X ±0.15			
DIAMETER	.X ±0.10				
Approved	Checked	Drawn	Unit	NAME	REV
			mm		
エレパーツ '25.08.20 大江	エレパーツ '25.08.20 森井	エレパーツ '25.08.20 大江	A4	AD75-NJ-SMAJ	1