

RoHS10 Support

REACH Support

CFSI Support







○仕様 (SPECIFICATION)

1. ELECTRICAL CHARACTERISTICS:

- 1.1 IMPEDANCE: 75Ω
- 1.2 FREQUENCY RANGE: DC ~ 12GHz.
- 1.3 VSWR: 1.3 Max. @6GHz.
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS Min.
- 1.5 INSULATION RESISTANCE: 5000 MEGOHMS Min.
- 1.6 CONTACT RESISTANCE:
 - 1.6.1 CENTER CONTACT: 5.0 MILLIOHMS Max.
 - 1.6.2 OUTER CONTACT: 2.5 MILLIOHMS Max.

2. MECHANICAL DATA:

- 2.1 RECOMMENDED COUPLING NUT TORQUE: 0.8 ~ 1.1N.m
- 3. ENVIRONMENTAL DATA:
 - 3.1 TEMPERATURE RANGE: -65~165°C

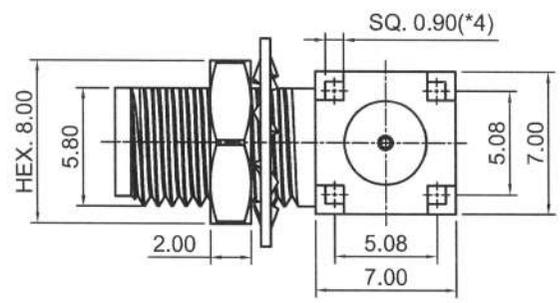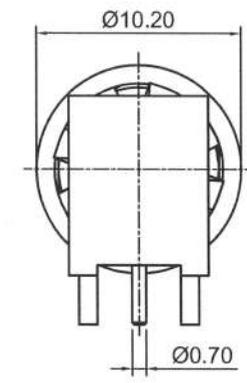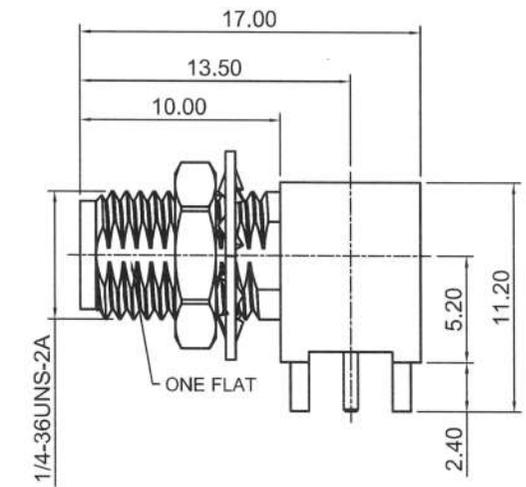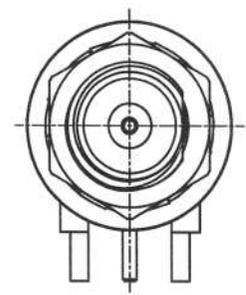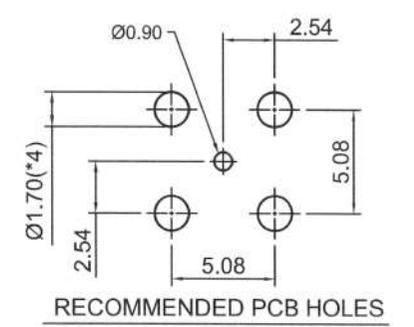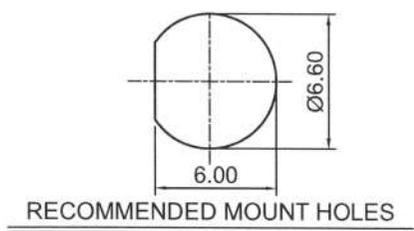

WARNING
DO NOT MATE WITH
SMA 50Ω PLUG

5	NUT	BRASS	NICKEL
4	WASHER	P.BRONZE	NICKEL
3	CONTACT PIN	BeCu	GOLD
2	Dielectric	PTFE	NATURE
1	BODY	BRASS	GOLD
ITEM	NAME	MATERIAL	TREATMENT



TOLERANCE				日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD	
DECIMALS	.XX ±0.10	.X ±0.15			
DIAMETER .X ±0.10			Unit	SMA-RL-05C-Au	
Approved	Checked	Drawn			
			A4	NAME	REV
					1